



Features

- ASCENT150 II SQ 1900 3K DALI EM is a high efficient downlight luminaire , Colour rendering index Ra >80, Colour temperature: 3000K Warm white, Class II, Protection rating IP44/IK03

Product Overview


Product name	ASCENT150 II SQ 1900 3K DALI EM
Technology	LED
Cap/Base	Screw Terminal
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Internal
General application	Hospitality, Office, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	1900
Luminaire efficacy (lm/W)	119
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	80
Glare control	< 22
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	433
Total power consumption (W)	16
Electrical protection	Class II

Concord

ASCENT150 II SQ 1900 3K DALI EM
2059391

Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	Aluminium
IP rating	IP44/20
IK rating	IK03
Product EAN number	5025768593910
Warranty	5 years
Dimming method	DALI, Switch-dim (mains-rated)

Photometry

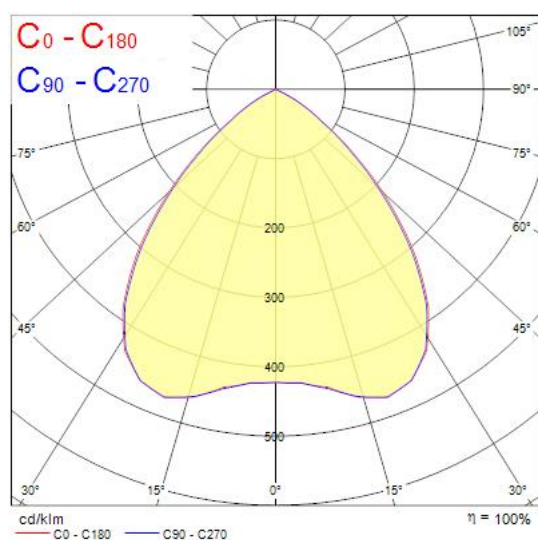

Technical drawings

