

### Features

- START Panel is a range of backlit LED panels used in recessed ceilings. Ideal for general indoor applications such as corridors, breakrooms, offices and meeting rooms. Luminaire dimensions are compatible with common ceiling installation, and the shallow design makes it easy to install in low ceilings. 4800Lm; 43W; 112Lm/W; Drive current: 950mA; Average lifespan: 100.000Hrs; 4000K; CRI 80; Glare control <19; IK03; IP40 (from the front); SDCM<3; Class II; SylSmart Connected (SSA) enabled.


### Product Overview

<b>Product name</b>	START Panel UGR19 600x600 4800Lm 840 SSA02
<b>Technology</b>	LED
<b>Housing</b>	Aluminium, Steel
<b>Mount</b>	Ceiling recessed mounting
<b>General application</b>	Education, Office
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4278370
<b>Fixture luminous flux (lm)</b>	4800
<b>Luminaire efficacy (lm/W)</b>	112
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Beam Angle (°)</b>	90
<b>Glare control</b>	< 19
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	43
<b>Electrical protection</b>	Class II
<b>Control gear type</b>	LED driver constant current

## START Panel UGR19 600x600 4800Lm 840 SSA02 0042391


Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288423913
Warranty	5 years
Dimming method	SylSmart SSA

### Photometry

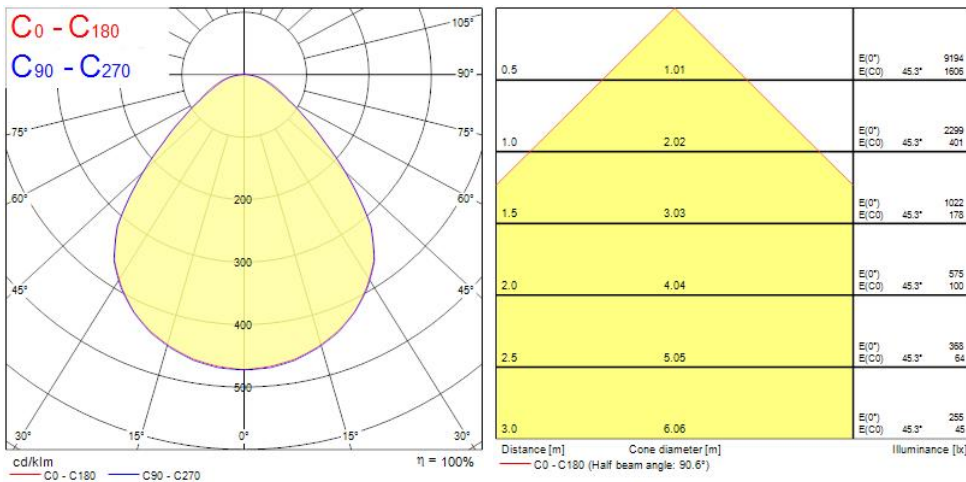

## START Panel UGR19 600x600 4800Lm 840 SSA02 0042391

### Technical drawings

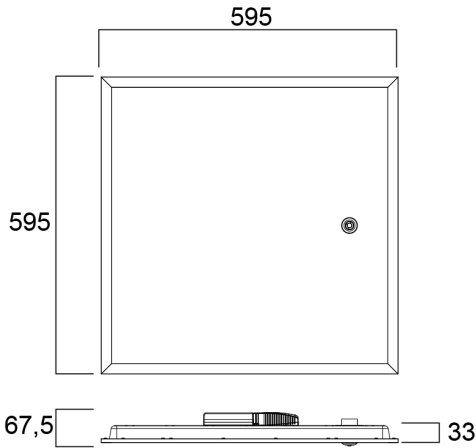

### Data table

#### GENERAL DATA

Product name	START Panel UGR19 600x600 4800Lm 840 SSA02
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4278370
Warranty	5 years

#### OPTICAL DATA

Fixture luminous flux (lm)	4800
Luminaire efficacy (lm/W)	112
Colour temperature (K)	4000

## START Panel UGR19 600x600 4800Lm 840 SSA02 0042391

Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	90
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

### ELECTRICAL DATA

Total power consumption (W)	43
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class II
Control gear required	Yes
Control gear type	LED driver constant current
Transformer required	No
Dimmable	Yes
Dimming method	SylSmart SSA
Minimum dimming level (%)	1
Drive current (mA)	950
Inrush Current (A)	30
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	27
Max. Luminaires per 16A C Breaker	33
Max. Luminaires per 20A C Breaker	42
Max. Luminaires per 10A B Breaker	12
Max. Luminaires per 13A B Breaker	16
Max. Luminaires per 16A B Breaker	20

## START Panel UGR19 600x600 4800Lm 840 SSA02 0042391

Max. Luminaires per 20A B Breaker	25
-----------------------------------	----

### LIFETIME DATA

Lifespan L70 B50	100000
------------------	--------

Lifespan L80 B20	71000
------------------	-------

### PHYSICAL DATA

Housing colour	RAL 9003 - Signal white
----------------	-------------------------

IP rating	IP40/20
-----------	---------

IK rating	IK03
-----------	------

Diffuser finish	Prismatic
-----------------	-----------

Diffuser material	Other
-------------------	-------

Nominal Product Length (mm)	595
-----------------------------	-----

Nominal Product Width (mm)	595
----------------------------	-----

Nominal Product Height (mm)	33
-----------------------------	----

Weight (kg)	2.095
-------------	-------

### PACKAGING

Single packaging type	Carton
-----------------------	--------

Product EAN number	5410288423913
--------------------	---------------

Packaging single length / height (cm)	70.0
---------------------------------------	------

Packaging single width (cm)	63.0
-----------------------------	------

Packaging single depth (cm)	8.5
-----------------------------	-----

DUN14 (outer)	15410288423910
---------------	----------------

Units per outer package	3
-------------------------	---

Packaging outer length / height (cm)	71.5
--------------------------------------	------

Packaging outer width (cm)	27.5
----------------------------	------

Packaging outer depth (cm)	65.0
----------------------------	------

### SAFETY DATA

Optimal operating condition (°C)	-10-45
----------------------------------	--------

Special purpose lamp	No
----------------------	----

Dry applications use only	No
---------------------------	----

# SYLVANIA

START Panel UGR19 600x600 4800Lm 840 SSA02  
**0042391**

Suitable for household illumination

No

**Light your world**