



Features

- The ASCENT 100 II ARCH 2550 3K IP65 DALI 160 is a high efficient DALI dimmable downlight luminaire, Colour rendering index Ra >80, Colour temperature: 3000K Warm White, Class II, Protection rating IP65/IK02, Cut out dimensions: 178mm

Product Overview


Product name	ASCENT 100 II ARCH 2550 3K IP65 DALI 160
Technology	LED
Cap/Base	Cable
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	2550
Luminous flux (lm)	2550
Luminaire efficacy (lm/W)	121
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	85
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	21

Concord

ASCENT 100 II ARCH 2550 3K IP65 DALI 160 2060702

Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP65/20
IK rating	IK02
Product EAN number	5025768607020
Warranty	5 years
Dimming method	DALI, Switch-dim (mains-rated)

Photometry

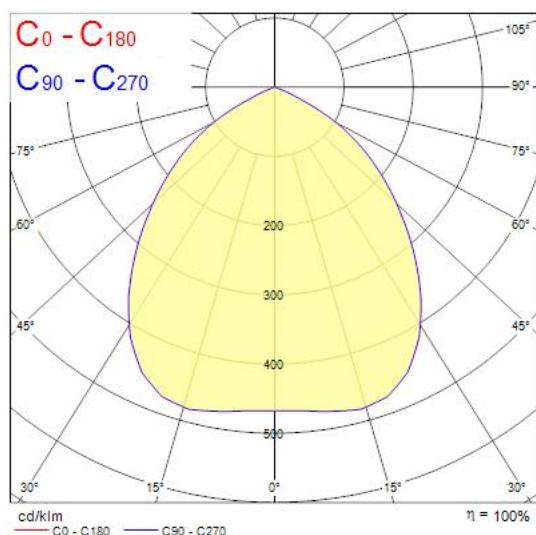

Technical drawings

