



## Features


- A click diffuser made of acrylic thermoplastic (PMMA). Operating temperature: -20 - 70 [°C]. IK rating: 08. UV resistant. Fire hazard certificate according to IEC 60695-2-11. Compatible with the following profiles: Profile deep wide surface 30 CDE-9/T (0022599), Profile shallow wide surface 30 CDE-9/T (0022600). Transparency level 70%.

## Product Overview

<b>Product name</b>	Cover D9 click 2m opal
<b>Technology</b>	Accessory
<b>Housing</b>	Aluminium
<b>General application</b>	Retail
<b>ETIM Class</b>	EC002557
<b>Housing colour</b>	Silver
<b>Product EAN number</b>	5410288226217
<b>Warranty</b>	3 years

Cover D9 click 2m opal  
**0022621**

## Technical drawings

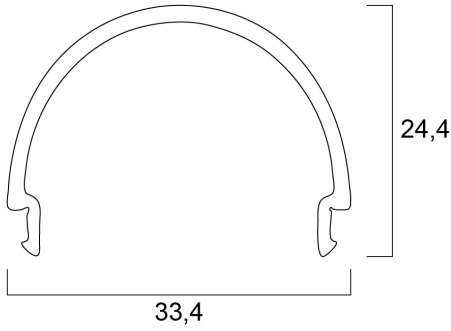

## Data table

### GENERAL DATA

Product name	Cover D9 click 2m opal
Technology	Accessory
Housing	Aluminium
General application	Retail
ETIM Class	EC002557
Warranty	3 years

### ELECTRICAL DATA

Control gear required	No
-----------------------	----

### PHYSICAL DATA

Housing colour	Silver
Diffuser finish	Opal
Nominal Product Length (mm)	2000
Nominal Product Width (mm)	33.4

## Cover D9 click 2m opal 0022621

Nominal Product Height (mm)	24.4
Weight (kg)	0.04

### PACKAGING

Single packaging type	Carton
Product EAN number	5410288226217
Packaging single length / height (cm)	200.0
Packaging single width (cm)	3.0
Packaging single depth (cm)	2.0
DUN14 (outer)	05410288226217
Units per outer package	25
Packaging outer length / height (cm)	205.0
Packaging outer width (cm)	16.0
Packaging outer depth (cm)	16.0

### SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No