


DV MOD 255 (951 001)


- High discharge capacity due to powerful creepage discharge spark gap
- Easy replacement of protection modules without tools due to module locking system with module release button
- The plug-in protection module can be replaced without the need to de-energise and without removing the distribution board cover



Figure without obligation



Basic circuit diagram DV MOD 255

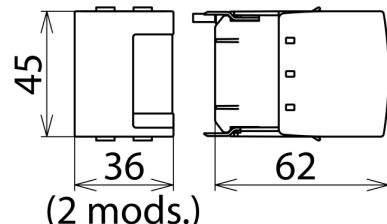

Dimension drawing DV MOD 255

Spark-gap-based protection module

| Type | DV MOD 255 |
|--|---|
| Part No. | 951 001 |
| Max. continuous operating voltage (a.c.) (U_c) | 264 V |
| Lightning impulse current (10/350 µs) (I_{imp}) | 25 kA |
| Specific energy (W/R) | 156.25 kJ/ohms |
| Follow current extinguishing capability [L-N] (a.c.) (I_f) | 50 kA _{rms} |
| Follow current limitation / Selectivity | no tripping of a 20 A gG fuse up to 50 kA _{rms} (prosp.) |
| Weight | 192 g |
| Customs tariff number | 85363090 |
| GTIN | 4013364108066 |
| PU | 1 Stk |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.