

Connecting comb 8-pole



product brand name	SIRIUS		
product category	Connecting combs		
product designation	Connecting comb		
design of the product	For linking the same potentials, current carrying capacity for infeed max. 6 A/8-pole		
General technical data			
display version LED	No		
product component	No		
• semi-conductor output			
flammability class of enclosure material	UL94 V-0		
reference code according to IEC 81346-2	X		
Substance Prohibittance (Date)	03/25/2015		
product component plug-in socket	No		
Connections/ Terminals			
product function removable terminal	No		
Installation/ mounting/ dimensions			
height	3.3 mm		
width	50 mm		
depth	11 mm		
Ambient conditions			
ambient temperature			
• during operation			
• during storage			
• during transport			
Certificates/ approvals			
General Product Approval		Declaration of Conformity	other



[Confirmation](#)



[Confirmation](#)

### Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RQ3901-0C>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RQ3901-0C>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RQ3901-0C>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RQ3901-0C&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RQ3901-0C&lang=en)

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3RQ3901-0C/manual>

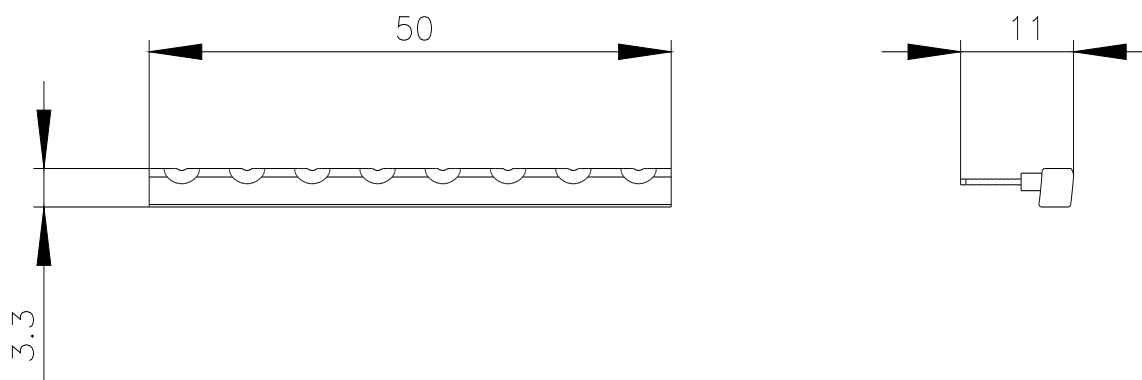

last modified:

5/6/2021 