




IND. CONT. EQ.
81U2
Class 2 Type 1

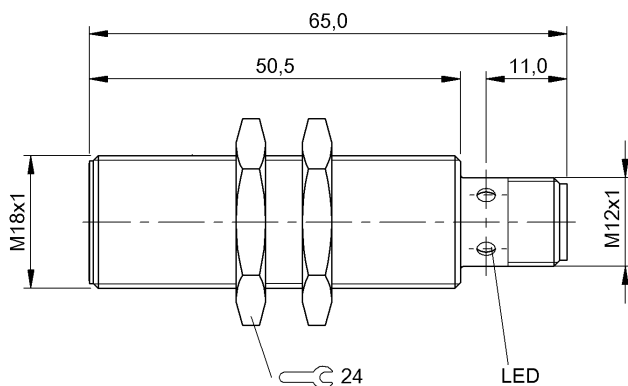

Basic features

Approval/Conformity	CE cULus EAC WEEE
Basic standard	IEC 60947-5-2 IEC 60947-5-7

Environmental conditions

Ambient temperature	-10...70 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 gn, 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
Protection degree	IP67

Display/Operation

Function indicator	Adjustment indicator
Power indicator	no

Functional safety

MTTF (40 °C)	640 a
--------------	-------

Electrical connection

Connection	M12x1-Male, 3-pin, A-coded
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Material

Housing material	Brass
Material sensing surface	PBT
Surface protection	nickel plated

Electrical data

Limit frequency -3 dB	500 Hz
Load resistance RL max.	500 Ohm
No-load current Io max. at Ue	10 mA
Operating voltage Ub	10...30 VDC
Protection class	II
Rated insulation voltage Ui	250 V AC
Rated operating voltage Ue DC	24 V
Ripple max. (% of Ue)	15 %
Slope I	4.00 mA/mm

Mechanical data

Dimension	Ø 18 x 65 mm
Installation	for flush mounting
Size	M18x1
Tightening torque	25 Nm

Output/Interface

Analog output	Analog, current 4...20 mA
Output characteristic	falling on approach
Output current at SI max.	20 mA
Output current at SI min.	4 mA
Output current at Se	12 mA

Range/Distance

Linearity range SI	1...5 mm
Measuring range	1...5 mm

Non-linearity max.	±120 µm
Repeat accuracy per BWN	±8 µm
Temperature drift max. from end value	±5.0 %

Remarks


With connector, e.g. BKS-S 20-... total length = switch length +18 mm.
Values referenced to axial approach of St 37 target. For other materials correction factors are applied.
Load resistance RL max. applies for Ub min. 16V.
When used in Balluff clamping holders, Ua may be reduced by max. 10%.
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams



Technical Drawings

