


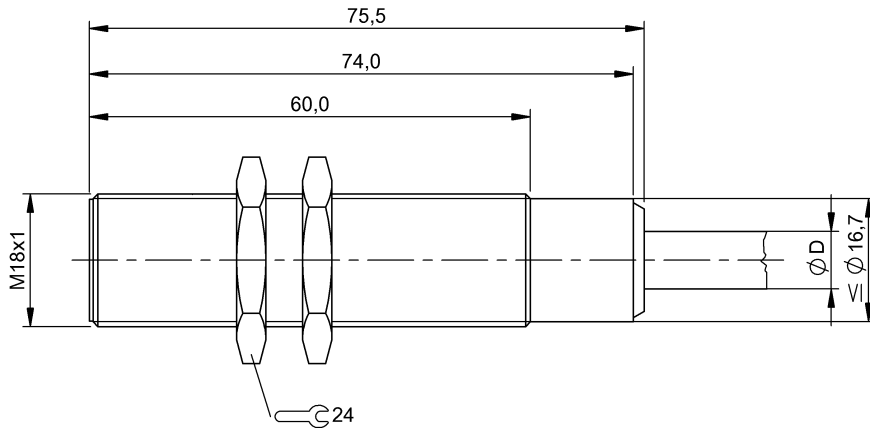

Basic features

Approval/Conformity	CE
	EAC
Basic standard	WEEE
	IEC 60947-5-2

Display/Operation

Function indicator	no
Power indicator	no

Electrical connection

Cable diameter D	7.80 mm
Cable length L	5 m
Conductor cross-section	0.75 mm ²
Connection type	Cable, 5.00 m, Silicone
Number of conductors	4
Polarity reversal protected	yes
Protection against device mix-ups	no
Short-circuit protection	no

Electrical data

Load capacitance max. at U _e	1 µF
Min. operating current I _m	0 mA
No-load current I _o max., damped	20 mA
No-load current I _o max., undamped	20 mA
Operating voltage U _b	10...30 VDC
Output resistance R _a	10.0 kOhm + D/10.0 kOhm + D
Rated insulation voltage U _i	75 V DC
Rated operating current I _e	400 mA
Rated operating voltage U _e DC	24 V
Rated short circuit current	100 A
Ready delay t _v max.	10 ms
Residual current I _r max.	100 µA
Ripple max. (% of U _e)	15 %
Switching frequency	500 Hz
Utilization category	DC -13
Voltage drop static max.	1.5 V

Environmental conditions

Ambient temperature	-25...120 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 gn, 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
Protection degree	IP60

Material

Housing material	Brass
Material jacket	Silicone
Material sensing surface	PBT
Surface protection	nickel plated

Inductive Sensors
BES 516-105-SA1-05
Order Code: BES02H4

BALLUFF

Mechanical data

Dimension	Ø 18 x 75.5 mm
Installation	for flush mounting
Size	M18x1
Tightening torque	25 Nm

Output/Interface

Switching output	PNP normally open/normally closed (NO/NC)
------------------	---

Range/Distance


Assured operating distance Sa	4 mm
Hysteresis H max. (% of Sr)	15.0 %
Rated operating distance Sn	5 mm
Real switching distance sr	5 mm
Repeat accuracy max. (% of Sr)	5.0 %
Temperature drift max. (% of Sr)	10 %
Tolerance Sr	±10 %

Remarks

Ta ≥ 70 °C... ≤ 120 °C: Ie ≤ 150 mA.

Recommendation: After a short circuit check the device for proper function.

Wiring Diagrams



1) For SCP see electrical data