

KombiSIGN 71 / WIN

# WIN slave control KS 71 24VAC/DC BK



Part No.: 860.640.22



## MECHANICAL DATA

Height	66 mm
Diameter	70 mm
Materials	PC
Housing colour	Black
Protection category	IP65
Connection	USB
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	100 g
Product weight	88 g

## ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	70 mA
Rated inrush current	<1A
Protection class	Protection class 2
Pollution degree	3
connectivity	WIN

## APPROVAL DATA

Conforms with CE	yes
WEEE	yes
Conforms with RED directive	Yes
Conform with ATEX-directive	no
Conforms with CCC	no
Conforms with UL	nein
Conforms with FCC	no
Conforms with IC	No
EAC Zertifikat vorhanden	yes
Conforms with AS-I	no
ICAO Certification	No
Conforms with GL	no
Conforms with RoHS CN	no
Conforms with VdS	no




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / WIN

**WIN slave control KS 71 24VAC/DC BK**

**DRAWING**

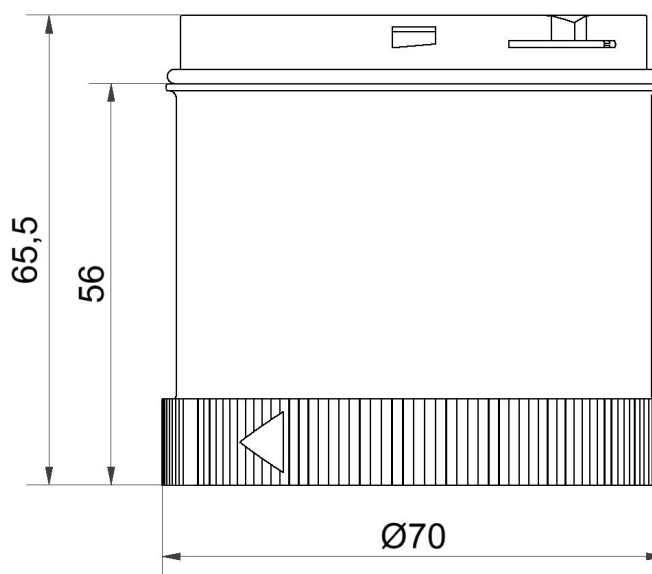

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.