

Ex horns and sirens / Ex-Signal Horn 750

Ex Signal horn WM Contin. tone 115VAC BK



Part No.: 750.000.67



MECHANICAL DATA

Length	152 mm
Width	148 mm
Height	360 mm
Diameter	148 mm
Materials	PC/ABS
Housing colour	Black
Protection category	IP55
Connection	Cable
cross-sectional area maximum	0,75mm² / 19AWG
Cable length	3000 mm
Type of fixing	Wall mounting
Working temperature minimum	-40°C
Working temperature maximum	+50°C
Weight with packaging	1364 g
Product weight	1217 g

ELECTRICAL DATA

Operating voltage	115V
Operating voltage type	AC
Operating voltage frequency	60Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	115 VAC
Rated operational current	205 mA
Rated inrush current	<500mA
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V

ACUSTICAL DATA

Volume (max) at 1m distance	105,0 dB (A)
Acoustic signal image	Continuous tone
Audio frequency	100 Hz
Acoustic service life	250 h minimum

APPROVAL DATA

Conforms with CE	yes
WEEE	yes
Conform with ATEX-directive	yes




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Ex horns and sirens / Ex-Signal Horn 750

Ex Signal horn WM Contin. tone 115VAC BK

ATEX-guidance	2014/34/EU
Ex approval number	BVS 03 ATEX E 118 X
Ex label for gas	II2G Ex mb IIC T5 Gb
Ex label for dust	-
Safety information	Observe instruction-leaflet!
Conforms with CCC	no
Conforms with FCC	no
Conforms with IC	No
EAC Zertifikat vorhanden	no
Conforms with AS-I	no
ICAO Certification	No
Conforms with GL	no
Conforms with RoHS CN	no
Conforms with VdS	no

DRAWING

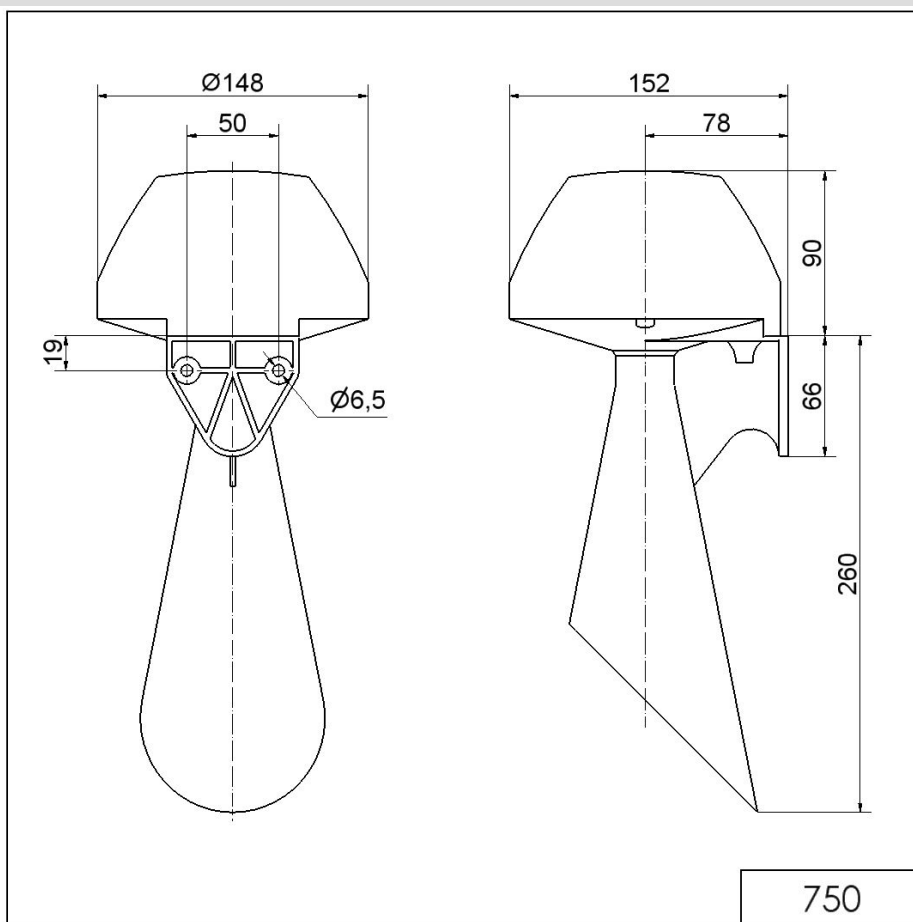

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.