

DOWNLIGHTS

ULTIMUM EXPRESS FLAT LED FIRE RATED DOWNLIGHT 4W/6W, IP65



PRODUCT INFORMATION DOCUMENT

FEATURES

- Unique wattage selectable design with choices of 4W and 6W via switch located on the back of the fitting
- Colour temperature selectable: allows selection between 3000/4000/6000K
- Lever style connector block allowing loop in loop out and installation in shallow ceiling voids
- Equipped with Osram LEDs to ensure high performance and reliability
- Shallow profile of only 46mm depth
- Matte Black and Polished Chrome trims available as accessories
- Tested in compliance with EN 1365-2 Fire resistance tests for loadbearing elements & EN 1363-1 Fire Resistance tests Part1: General Requirements
- Fire Tested for use in 30min/60min/90min Solid Timber Joists
- Tested for use with I-Joists & Metal Web Joists

CONSTRUCTION

- LEDchroic lens optic
- Die-cast aluminium heatsink
- Pressed steel and polycarbonate body
- Spring steel ceiling fixing springs with PVC protectors

WARRANTY	5 YRS	LIFETIME	50,000 HRS	LUMENS PER W	137-130	FIRED RATED	IP	65	OP 220 240	OPERATING VOLTAGE	BEAMANGLE	60°	DIMMABLE	3000K 4000K 6000K	CCT	SAFETY CLASS
Product Code:																RULFX-01
Comparable to:																50W halogen
Total Power (W):																4.0/5.8
Power Factor:																0.8
Total Light Output (lm):																540/750
Emergency Light Output (lm):																NA
Efficacy (lm/cctW):																137/130
Lux at 1m (lux):																410/570
Emergency Lux at 1m (lux):																NA
CCT (K):																3000/4000/6000
CRI:																80
IP:																65
Operation Temperature (°C):																-20 ≤ Ta ≤ +35
Inrush Current:																42A/11.2us
RG Value:																0
SDCM:																6
Energy Class:																D
Rated Life to L70B50 (Hrs):																82000
Rated Life to L80B10 (Hrs):																51000
Rated Life to L90B10 (Hrs):																24000
Dimensions ØxH (mm):																85x46
Cut Out (mm):																60
Weight (kg):																0.20

Separate Control Gear Information

Type of Light Source:	LED
Full Load Efficiency (%):	80
P _{NET} (W):	NA
Dimensions (mm):	42x39x17

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

ULTIMUM EXPRESS FLAT LED FIRE RATED DOWNLIGHT 4W/6W, IP65

Cone Illuminance Diagram

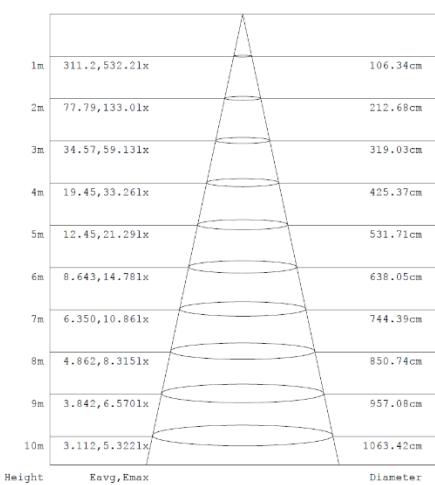


Diagram for RULFX-01 in 6W, 4000K. Other diagrams available on request

Polar Intensity Diagram


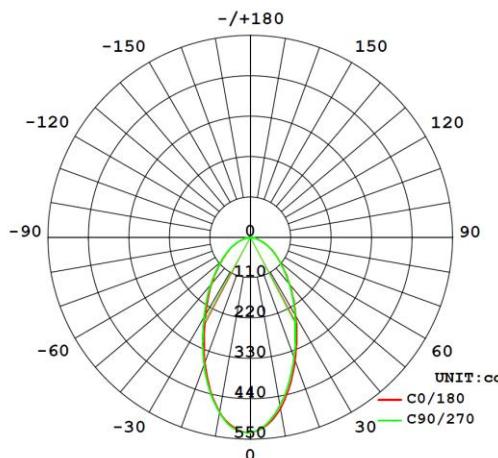


Diagram for RULFX-01 in 6W, 4000K. Other diagrams available on request

Dimension Diagram

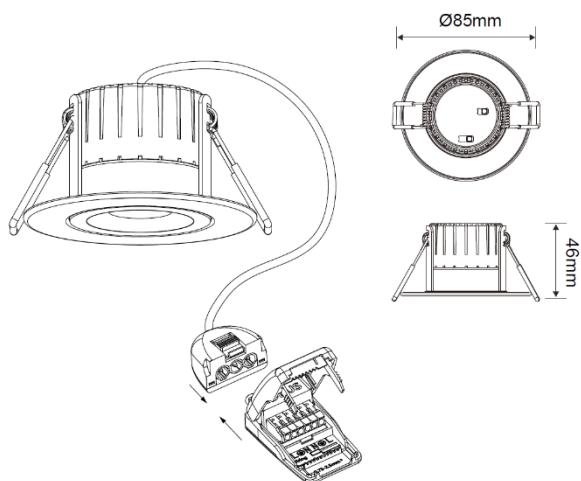

Accessories

RULFXTRIM-04	ULTIMUM+ trim, Polished Chrome
RULFXTRIM-13	ULTIMUM+ trim, Matte Black
RLA250DTG-01	LOADPRO 250W LED Grid Dimmer
R1001G2W	100W LED Wall Plate Dimmer

Sensor Data

Time Off Delay:	NA
Illuminance Switching Range:	NA
Sensitivity Range (%):	NA
Mounting Height (max):	NA
Detection Zone Diameter (max):	NA

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE