

# Black Tiled Fan Domestic Range

BLK100



The Manrose Black Tiled fan offers a low sound level of only 38dB (A), has a stylish and versatile design, also available with a timer model.

Designed for wall and panel mounting, this comprehensive range is ideal for bathrooms and toilets.

- High quality, long life motors and warranted for a minimum of 30,000 hours or 3 years
- Manufactured using thermoplastics for strength and durability
- Decibel Level of only 38 dB(A) at 3m
- An impressive extraction rate of 75m<sup>3</sup>/hr, 21 litres per second
- Low energy motor with a maximum consumption of 16 Watts
- Complete with integral backdraught shutters


# Technical Details

## Cat. No. Product type

<b>BLK100S</b>	Standard model for remote switching
<b>BLK100T</b>	Timer model incorporating integral adjustable electronic timer (1-20mins)


## Dimensions (mm)

A	B	C	D	EØ
158	112	34	78	98

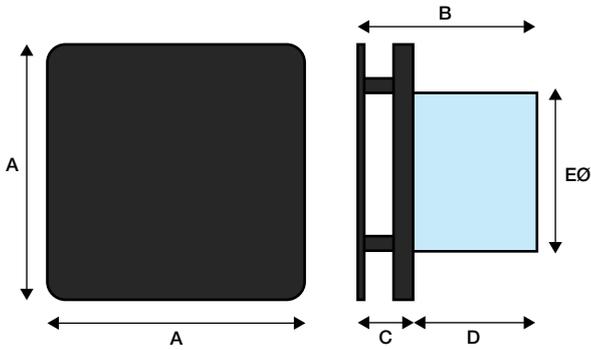

## Performance Graph

BLK100 75m<sup>3</sup>/hr, 21 litres per second

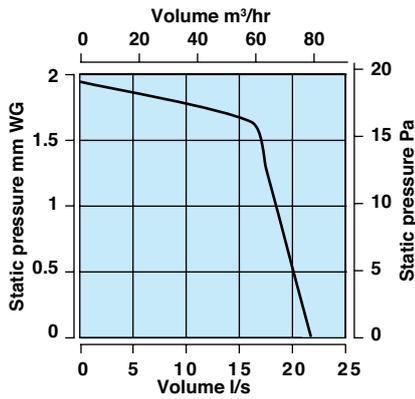

## Electrical

220-240V~50Hz AC Single Phase consuming 16 watts. These fans are double insulated and do not require an earth. All wiring must comply with current IEE regulations. A double pole isolating switch, having a contact separation of at least 3mm in all poles, must be used with a 3 amp fuse fitted. The fan must not be accessible to a person using either the shower or bath and mounted a minimum of 1.8 metres from the floor.

## Additional Data

Fan Speed: 2300 r.p.m.  
 IP Rating: IPX4  
 Sound Volume: 38 dB(A)  
 Maximum Operating Temperature: 40°C