

Slimline Horizontal Louvre Airbrick Accessories



Low Resistance Inlet/Outlet Airbrick

- Provides over 90% free area of duct
- Easier to install than a double airbrick
- Guide vanes for improved duct connection
- Optional first fix duct section
- Available in five colours

This low resistance airbrick has been designed to comply with the latest Building Regulations Approved Document F, which requires a ventilation outlet to achieve a minimum of 90% of the cross sectional area of the ductwork.

Installing a single airbrick is much simpler than a double airbrick and offers more versatility for locations. Suitable for installation with round 100 mm and 125 mm diameter and rectangular 204x60 mm ducting.

Attaching duct to the airbrick is simplified by the use of guide vanes which help locate the duct onto the spigot.


A 500 mm section of 204x60 mm duct is available for first fix which ensures that connections are accessible after completion of building works. Five colour options ensure that the low resistance airbrick will be a match for almost any application.

	Cat. No.	Colour
	45010W	White
	45010CS	Cotswold Stone
	45010T	Terracotta
	45010B	Brown
	45010BLK	Black
	45010G	Grey

Resistance (Pa) at flow rate

8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
-	-	5.2	9.6	15.2	22.7	30.8	40.9

Performance

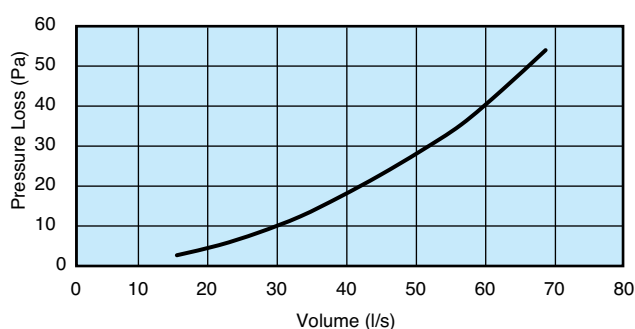

Dimensions (mm)

A	B	C	D
212	67	58	65

