

32W 120lm/W 600x600 Led Backlit Panel 4000K or 6000K TP(a) UGR <19



Range

BR2114	32W LED Panel 4000K 600x600
BR2115	32W LED Panel 6000K 600x600

Features

- Slim profile, white aluminium frame with high quality TP(a) diffuser, providing low glare (UGR<19)
- Quick-fix connector, featuring loop-in and loop-out terminals, simplifies series linking installations
- Back lit design for increased lumen efficacy
- Compatible with Brackenheath's plug in, self-test emergency pack BR1129
- Ideal for ceilings with surface and suspension mounting kits readily available. 6x wire suspension kit is BR1130, while the surface mount kit 600x600 is BR1131IP20 rating for indoor use
- 5-year guarantee

Technical Specification

Voltage	220-240V		
Frequency	50-60Hz		
Wattage	32W		
Power Factor	>0.9		
Colour Temperature	BR2114 – 4000K BR2115 - 6000K		
Light Output		Lumens	Efficacy
	BR2114	4400Lm	120Lm/W
	BR2115	4400Lm	120 Lm/W
Light Source Lumens	4600Lm		
Beam Angle	90°		
IP Rating	IP20		
Dimmable	No		
Light Source	Non-replaceable LED		
Lifespan	50,000hrs		
Standards	BS EN 60598-1		
Energy Rating	D		
Warranty	5 Years		

Description



Brackenheath's LED backlit panel solution for a range of commercial applications

With backlit LED configuration, the LED panel ensures enhanced uniformity of illumination, in addition to an increased efficiency of light output
Slim profile, white aluminium frame with high quality TP(a) diffuser, providing low glare (UGR<19)

Dimensions

	Length	Width	Depth
BR2114	595mm	595mm	30mm
BR2115	595mm	595mm	30mm

Contact your local authority for information concerning the correct disposal of your product.

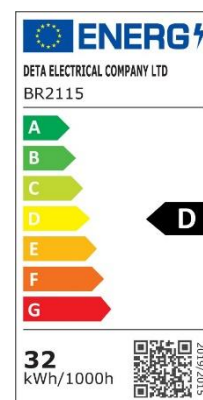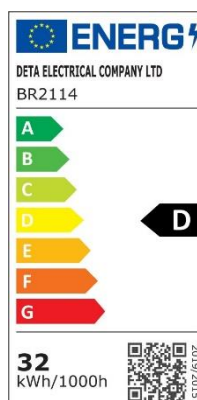

Deta Electrical Company Ltd.

UK: Panattoni Park Luton Road Chalton Bedfordshire LU4 9TT UK
EU: Unit 16 Ashbourne Industrial Estate Ashbourne Co. Meath A84 W972 Ireland
Tel. +44 1582 544 548 technical@deta.co.uk