



## STBT4

Suretime 2 Hour Electronic Boost Timer


### Features

- Typical applications - Immersion Heaters – Room Heaters - Towel Rails - Lighting
- Various Boost Options
- Automatic timer countdown for up to 2 hours.
- Cancellation of countdown time by pressing the boost button mid-cycle.
- Bright illumination of the boost button at all times.
- Minimalist and simple to use!
- LED indicators for approximate time left on countdown.
- Ideal for immersion control systems not racking up a huge bill.
- Fits a standard flush or surface BS wall box with 25mm depth.

### Dimensions

Weight: 113g  
Height: 85mm  
Width: 85mm  
Depth: 31mm

### Line Diagram(s)

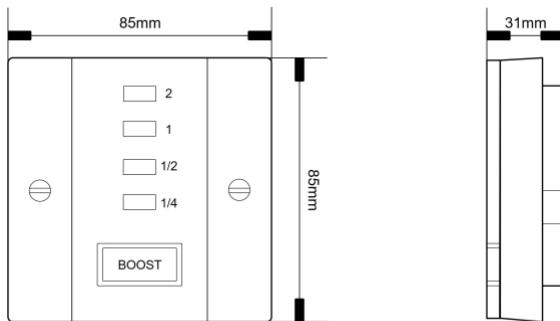

### Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface
Earth Class Rating	Class II
Operating Temperature	0°C to 45°C
Ingress Protection Rating	IP20
Setting Type	Button Press
Back Box Minimum Depth (mm)	25
Push Buttons	Yes (Boost Button)
Mounting Hole Centres (mm)	60
Standby Consumption	<1W
Number Of Channels	1
Switch Rating	13A Resistive, 80W LED, 1000W Halogen, 500W Fluorescent, 100W Low Energy Lighting
Shortest Switching Time	15 Minutes
Time Delay Range	15 Min, 30 Min, 1 Hour, 2 Hours
Permanent ON Facility	No
Multiple Unit Support	No
Cable Entry(s)	Back Entry, Bottom Entry
Body Construction	Polycarbonate
Product Colour	White
Accessories (Included)	Screws