



NTT01

24 Hour Compact Immersion Heater Timeswitch


Features

- 96 Quick-Set Segments for up to 48 ON/48 OFF Programmes Per 24 Hrs
- Red LED 'Mains ON' and Green LED 'Output' Indicators For Easy Viewing
- 'Traffic Light' Slide Switch for Easy ON (green), Auto (green & red) and OFF (red) Mode Indication
- Switches ON and OFF at Preset Times
- Easy to Use Captive Segment Dial
- Permanent ON/OFF Control
- Fits a Standard Flush or Surface Mount Box min 32mm

Dimensions

Weight: 160g
Height: 92mm
Width: 92mm
Depth: 60mm

Line Diagram(s)

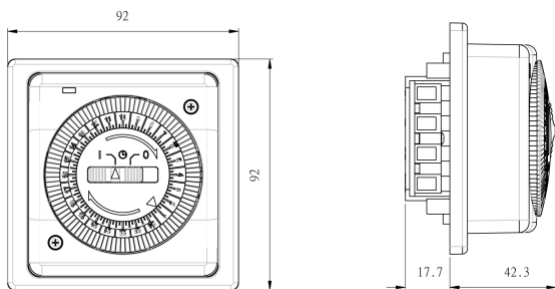

Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface Mount
Earth Class Rating	Class II
Operating Temperature	0°C to 40°C
Ingress Protection Rating	IP20
Setting Type	Segment
Back Box Minimum Depth (mm)	32
Program Modes	24 Hour
Mounting Hole Centres (mm)	60
Standby Consumption	<1.43W
Number Of Channels	1
Switch Rating	16A Resistive 6A Inductive, 100W LED
Shortest Switching Time	15 Minutes
Programmable Slots	48 ON 48 OFF (96 Segments)
Permanent ON Facility	Yes (Slider Switch)
Cable Capacity (mm ²)	1.5 - 2.5mm ² Flexible Cable
Cable Entry(s)	Back Entry
Body Construction	Polycarbonate
Product Colour	White
Accessories (Included)	Fittings (Raw Plugs, Screws)