




Features

- 96 Quick-Set Segments for up to 48 ON/48 OFF Programmes Per 24 Hrs
- Red LED 'Mains ON' indicator for easy viewing
- 'Traffic Light' Slide Switch for Easy ON (green), Auto (green & red) and OFF (red) Mode Indication
- Switches ON and OFF at Preset Times
- Easy to use captive segment dial
- Permanent ON/OFF control
- Fits a standard flush or surface mount box min 32mm
- Voltage Free Contacts

Dimensions

Weight: 157g
 Height: 92mm
 Width: 92mm
 Depth: 60mm

Line Diagram(s)

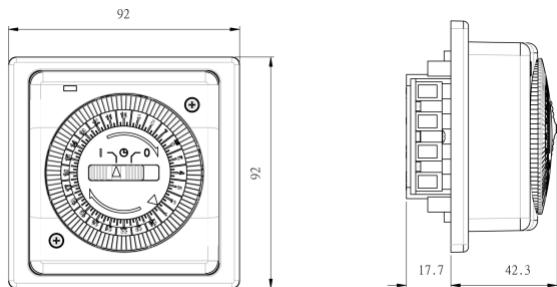

NTT02

24 Hour Compact General Purpose Timeswitch with Voltage Free Contacts

Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface Mount
Earth Class Rating	Class II
Operating Temperature	0°C to 40°C
Ingress Protection Rating	IP20
Setting Type	Segment
Back Box Minimum Depth (mm)	32
Program Modes	24 Hour
Voltage Free Contacts	Normally Open
Mounting Hole Centres (mm)	60
Standby Consumption	<1.43W
Number Of Channels	1
Switch Rating	16A Resistive, 8A Inductive, 1HP Motor, 750W Halogen/Fluorescent, 100W CFL, 100W LED
Shortest Switching Time	15 Minute
Programmable Slots	48 ON 48 OFF (96 Segments)
Permanent ON Facility	Yes (Slider Switch)
Cable Capacity (mm ²)	1.5 - 2.5mm ² Flexible Cable
Cable Entry(s)	Back Entry
Body Construction	Polycarbonate
Product Colour	White
Accessories (Included)	Fittings (Raw Plugs, Screws)