



Description

Weathersafe Rotary Isolator Switch

Range

IS3N-20AC – 3 Pole 20 Amp

IS3N-32AC – 3 Pole 32 Amp

IS4N-20AC – 4 Pole 20 Amp


IS4N-32AC – 4 Pole 32 Amp

Features

- 3 & 4 Pole AC Isolator switch
- 20 & 32 Amp versions
- On load switch disconnectors
- Switch module can be removed from DIN assembly for quick and easy first fix
- Interlocking front covers, can only be removed when in the 'OFF' position
- Lockable switch prevents tampering
- IP66 rating
- Top & bottom M25 screw cap cable entry points
- Side knockouts available for M12, M16 & M20

Dimensions

	A	B	C	D	E	F	G	H
IS3-20, IS3-32, IS4-20, IS4-32	190 mm	95 mm	82 mm	110 mm	2x M25	115 mm	75 mm	170 mm

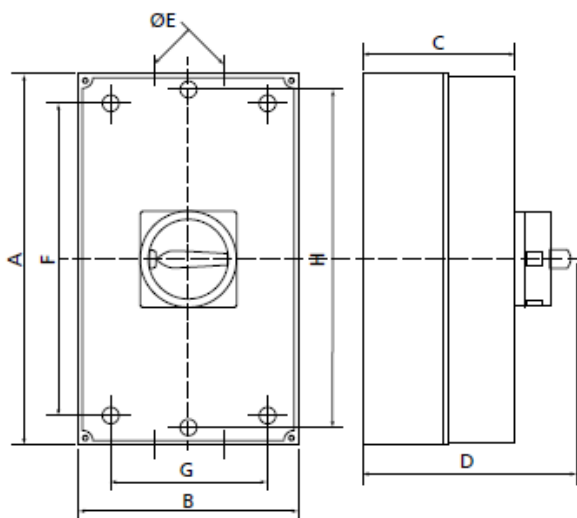

Technical Specification

3 & 4 POLE AC ISOLATOR	
Input Voltage	230V AC
Frequency	50Hz
Installation Type	Surface Mount
Operating Temperature	0°C to 40°C
IP Rating	IP66
Setting Type	Rotary Isolator
Contact Type	Normally Open
Rotary Switch Poles	3 or 4
On Load Switch Disconnectors	Yes
Switch Rating	20A or 32A
Cable Entry(s)	Multiple M25 screw caps
Cable Capacity (mm ²)	20A – 2.5mm ² & 32A – 6mm ²
Body Construction	Polycarbonate
Conformance	EN 60947-3