



Description


DS4 - Pneumatic Time Delay Switch
Simply push the button and turn the lights ON from 10 seconds to 10 minutes.

Features

- Replaces existing single gang wall switch
- Ideal for staircases and corridors
- Variable delay times
- Single pole/neutral not required
- Compatible with 20mm back boxes

Dimensions

	H	W	D
DS4	82mm	82mm	40 mm

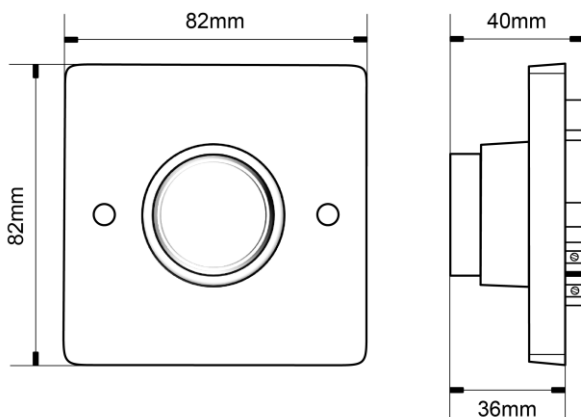

Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Flush Wall Box / Surface Mount Patress Box
Earth Class Rating	Class II
Operating Temperature	-10°C to +40°C
IP Rating	IP20
Connection	2-Wire
Back Box Minimum Depth (mm)	20
Push Buttons	Push To Make
Switch Type	Single Pole (Normally Open)
Standby Consumption	<0W
Number Of Channels	1
Switch Rating	1.4kW (Resistive) Filament Lamps, 700W Fluorescent, 3A Inductive loads, 80W LED. The LED switching capabilities of this product can be increased up to 200W by the addition of the Timeguard ZV900 Automatic Switch Load Controller. The ZV900 is sold separately
Time Delay Range	10 Seconds to 10 Minutes, User Adjustable (via a tamper-proof timing screw)
Multiple Unit Support	3 DS4 Units Max (wired in parallel to control the same load).
Cable Entry(s)	Back Entry

General

Weight (g)	81
Protruding Depth (mm)	36
Body Construction	Polycarbonate
Product Colour	White
EAN Number	5012483012284
Trade Tariff Commodity Code	8536508090