

# EXITOR



**LED emergency exit signage**  
from Channel Safety Systems




# Emergency Exit Sign

The Exitor utilises LED technology for low cost, high output, emergency illumination.

## Features

- Maintained or Non-maintained 3 hour emergency back-up
- Down light panel LEDs to illuminate exit door.
- Low environmental impact
- Minimal maintenance
- Meets BS EN 60598-2-22 and other relevant standards
- Lightweight & easy to install, hinged cover
- Low environmental impact
- Minimal maintenance
- Supplied with full legend set
- Lithium LifePo4 battery

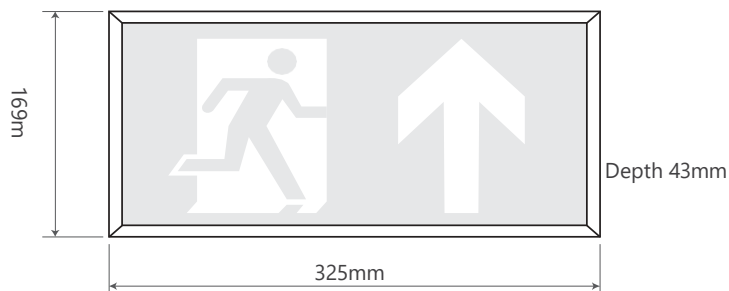

**Note: Image not to scale and for pictorial reference only**

## SPECIFICATIONS

Light Source	SMT LED 3W
IP Rating	IP50
Emergency Duration	3 hours (minimum)
Mains Voltage	230V 50Hz $\pm$ 10%
Mains Current	CHARGING 55-90MA - 35mA quiescent (3W)
Recharge Periods	Less than 24 hour
Charge Indicator	Integral green LED
Changeover Voltage	As per the requirements of BS EN 60598-2-22
Temperature Range	5°C to 40°C
Weight	690gm
Battery	3.2V 1500mAH Lithium LiFePo4
Material & Finish	Polycarbonate construction, white/opal finish

## PRODUCT CODE

E/EX/M3/Li

## DESCRIPTION

EXITOR LED exit sign c/w full legend set

Errors & omissions excepted. Specification is subject to change without notice.



[www.channelsafety.co.uk](http://www.channelsafety.co.uk)

**Tel: 0845 884 7000**

**Email: [sales.lfs@deta.co.uk](mailto:sales.lfs@deta.co.uk)**

**Deta Electrical Company Ltd.**

UK: Panattoni Park Luton Road Chalton Bedfordshire LU4 9TT UK  
EU: Unit 16 Ashbourne Industrial Estate Ashbourne Co. Meath A84 W972  
[sales.lfs@deta.co.uk](mailto:sales.lfs@deta.co.uk)