


Hard Stamped Conduit Tube

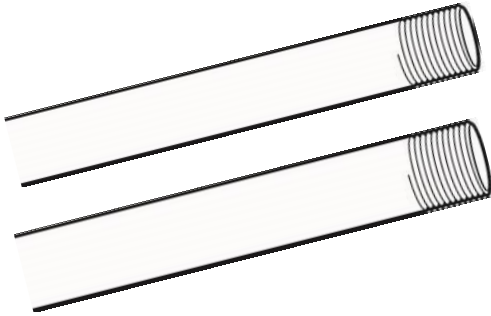

Description

A range of high quality conduit tube for cable management in major project, offering a high level of mechanical strength.

Features

- Hot dipped galvanised inside and out to class 4
- Stamped markings during the manufacturing process
- Threaded at both ends
- Each length supplied with one coupler and one plastic thread protector cap
- Available in 20mm, 25mm and 32mm in 3750mm lengths

Range

20mm	3750mm	DTS20375
25mm	3750mm	DTS25375
32mm	3750mm	DTS32375

Technical Specification

Material	Steel grade Q195
Manufacturing process	Cold rolled, heat treated and seam welded
Resistance against corrosion	Hot dipped galvanised to BS EN 61386 Class 4
Typical Zinc thickness	>55µm nominal

Supply Bundles

Product Code	Outer Ø (mm)	Lengths / master bundle	Weight / master bundle approx.	Lengths / Small bundle	Weight / small bundle approx.
DTS20375	20	400	1,108kg	8	22.16kg
DTS25375	25	320	1,128kg	8	28.2kg
DTS32375	32	100	475kg	4	19kg