
Data Sheet | Item Number: 2003-499

Test plug adapter N/L; for 2003-6641 and 2003-6640 Multilevel Installation Terminal Blocks; for vertical test slot; 2-pole; gray

https://www.wago.com/2003-499



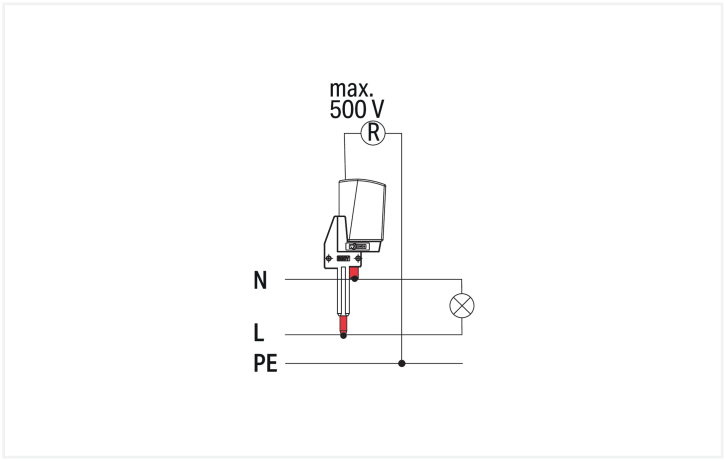

Color: gray

Electrical data

Ratings per IEC/EN

Nominal voltage (III/3)	500 V
Rated impulse withstand voltage (III / 3)	6 kV
Rated current	16 A

General information

Wiring direction	Side-entry wiring

Connection Data

Clamping units	1
Total number of potentials	1

Connection 1

Connection technology	CAGE CLAMP®
Solid conductor	0.5 … 2.5 mm² / 20 … 16 AWG
Stranded conductor	0.5 … 1.5 mm² / 20 … 16 AWG
Fine-stranded conductor	0.5 … 2.5 mm² / 20 … 16 AWG
Strip length	9 … 11 mm / 0.35 … 0.43 inches
Wiring direction	Side-entry wiring

Material data

Note (material data)	Information on material specifications can be found here
Color	gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.056 MJ
Weight	3.3 g

Environmental requirements

Processing temperature	-35 … +85 °C
Continuous operating temperature	-60 … +105 °C

Commercial data

Product Group	22 (TOPJOB S)
PU (SPU)	100 (25) pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821322115
Customs tariff number	85366990990

Product Classification

UNSPSC	39121410
eCl@ss 10.0	27-14-11-48
eCl@ss 9.0	27-14-11-48
ETIM 9.0	EC002555
ETIM 10.0	EC002555
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2003-499

Documentation

Bid Text

2003-499	19.02.2019	xml 2.59 KB	
2003-499	28.04.2017	doc 23.50 KB	


Continued on next page

CAD/CAE-Data

CAD data	CAE data
2D/3D Models 2003-499	WSCAD Universe 2003-499

Installation Notes

Testing



Multilevel installation terminal block fitted with an N/L-test plug adapter for quick and safe insulation resistance measurement of the connected N- and L-potentials