
Data Sheet | Item Number: 2007-8811

2-conductor disconnect/test terminal block; e.g., voltage transformer circuits; with touch-proof test sockets; for 4 mm Ø test plugs; for DIN-rail 35 x 15 and 35 x 7.5; 6 mm²; Push-in CAGE CLAMP®; 6,00 mm²; gray

https://www.wago.com/2007-8811



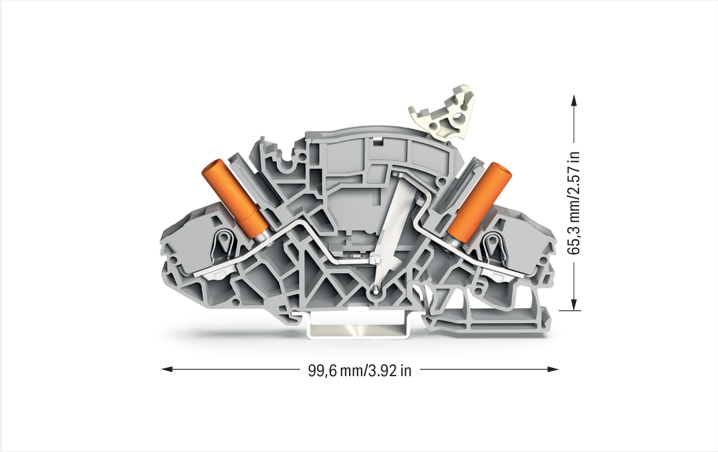

Color: gray



Voltage transformer terminal block, 2007 Series, gray

Seamless electrical installations are guaranteed with this voltage transformer terminal block (item number 2007-8811). Conductors can only be connected to this voltage transformer terminal block if their strip length is between 13 and 15 mm . This product features conductor terminals and utilizes Push-in CAGE CLAMP®. Push-in CAGE CLAMP® connection technology is ideal for connecting all conductor types. Both solid and fine-stranded conductors with ferrules can be inserted without the need for tools—all thanks to its pluggable design. Depending on the conductor type, this voltage transformer terminal block is suitable for conductor cross sections ranging from 0.5 mm² to 10 mm².

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	500 V	-	-
Rated impulse withstand voltage	6 kV	-	-
Rated current	30 A	-	-

Approvals per	UL 1059		
Use group	B	C	D
Rated voltage	300 V	300 V	300 V
Rated current	30 A	30 A	10 A

Continued on next page

Approvals per	CSA 22.2 No 158		
Use group	B	C	D
Rated voltage	300 V	300 V	300 V
Rated current	30 A	30 A	10 A

Power Loss	
Power loss, per pole (potential)	0.702 W
Rated current I_N for power loss specification	30 A
Resistance value for specified, current-dependent power loss	0.00078 Ω

General information	
Wiring direction	Front-entry wiring

Connection Data

Clamping units	2
Total number of potentials	2
Number of levels	1
Number of jumper slots	2

Connection 1	
Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool
Connectable conductor materials	Copper
Nominal cross-section	6 mm² / 10 AWG
Solid conductor	0.5 … 10 mm² / 20 … 8 AWG
Solid conductor; push-in termination	1 … 10 mm² / 14 … 8 AWG
Fine-stranded conductor	0.5 … 10 mm² / 20 … 8 AWG
Fine-stranded conductor; with insulated ferrule	0.5 … 6 mm² / 20 … 10 AWG
Fine-stranded conductor; with uninsulated ferrule	1.5 … 6 mm² / 16 … 10 AWG
Fine-stranded conductor; with ferrule; push-in termination	2.5 … 6 mm² / 16 … 10 AWG
Strip length	13 … 15 mm / 0.51 … 0.59 inches
Wiring direction	Front-entry wiring

Physical data

Width	8 mm / 0.315 inches
Height	99.6 mm / 3.921 inches
Depth from upper-edge of DIN-rail	65.3 mm / 2.571 inches

Mechanical data

Mounting type	DIN-35 rail
Marking level	Center/side marking

Material data

Note (material data)	Information on material specifications can be found here
Color	gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.381 MJ
Weight	27.9 g
Test socket color	orange

Continued on next page

Environmental requirements

Processing temperature	-35 … +85 °C
Continuous operating temperature	-60 … +105 °C

Environmental Testing

Test specification: Railway applications – Rolling stock – Electronic equipment	DIN EN 50155 (VDE 0115-200):2022-06
Test procedure: Railway applications – Rolling stock equipment – Vibration and shock tests	DIN EN 61373 (VDE 0115-0106):2011-04
Spectrum/Mounting location	Service life test, Category 1, Class A/B
Functional test with noise-like oscillations	Test passed according to Section 8 of the standard
Frequency	f_1 = 5 Hz to f_2 = 150 Hz
Acceleration	0.101g (highest test level used for all axes)
Test duration per axis	10 min.
Test directions	X, Y and Z axes
Monitoring of contact faults and interruptions	Passed
Voltage drop measurement before and after each axis	Passed
Simulated service life test through increased levels of noise-like oscillations	Test passed according to Section 9 of the standard
Frequency	f_1 = 5 Hz to f_2 = 150 Hz
Acceleration	0.572g (highest test level used for all axes)
Test duration per axis	5 h
Test directions	X, Y and Z axes
Extended testing: Monitoring of contact faults and interruptions	Passed
Extended testing: Voltage drop measurement before and after each axis	Passed
Shock test	Test passed according to Section 10 of the standard
Shock pulse form	Half sine
Acceleration	5g (highest test level used for all axes)
Shock duration	30 ms
Number of shocks (per axis)	3 pos. und 3 neg.
Test directions	X, Y and Z axes
Extended testing: Monitoring of contact faults and interruptions	Passed
Extended testing: Voltage drop measurement before and after each axis	Passed
Vibration and shock stress for rolling stock equipment	Passed

Commercial data

Product Group	22 (TOPJOB S)
PU (SPU)	20 pcs
Packaging type	Box
Country of origin	CN
GTIN	4055143074797
Customs tariff number	85365080000

Continued on next page

Product Classification

UNSPSC	39121410
eCl@ss 10.0	27-14-11-26
eCl@ss 9.0	27-14-11-26
ETIM 9.0	EC000902
ETIM 10.0	EC000902
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	99111920-15e9-4f47-b668-fa89b1d82bae
SCIP notification number (Belgium)	4d6c5d09-d9df-4fcf-bc86-2be9512526da
SCIP notification number (Bulgaria)	cb3e978f-7849-4806-a6f1-064f7d334e6b
SCIP notification number (Czech Republic)	70e7e9cc-1c20-4ce8-bed1-a6b1f9e3213c
SCIP notification number (Denmark)	ca9760a0-4f32-4606-8936-747d52f874df
SCIP notification number (Finland)	985d8dee-693c-465e-b9a6-d1e9eacc75fa
SCIP notification number (France)	bd6254eb-6ddd-433f-b998-aecde4d15293
SCIP notification number (Germany)	98088e6c-b17f-46db-99f6-d2bcf98e83f0
SCIP notification number (Hungary)	ec983592-d14b-41a9-832e-ba31173293c3
SCIP notification number (Italy)	65c68b77-f374-4b3f-90f9-a67c64922138
SCIP notification number (Netherlands)	ff3bfbad-ef37-4b64-93b5-25bfca5134db
SCIP notification number (Poland)	54586fa6-bfa1-4331-92ea-0aea3dd7f82e
SCIP notification number (Romania)	9dfb224a-1463-4c9a-a77f-d4d8137c9578
SCIP notification number (Sweden)	c9b09a63-1240-4086-8b28-415652f83ac5

Approvals / Certificates

General approvals

Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60947	NTR NL-8021
CSA DEKRA Certification B.V.	C22.2 No. 158	70009679
KEMA/KEUR DEKRA Certification B.V.	EN 60947	71-131652
UL UL International Germany GmbH	UL 1059	E45172

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
Railway WAGO GmbH & Co. KG	-	Railway Ready
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for marine applications

Approval	Standard	Certificate Name
DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001V2
PRS Polski Rejestr Statków	-	TE/1094/880590/23

Continued on next page

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2007-8811

Documentation

Bid Text

2007-8811	17.04.2019	xml 4.06 KB
2007-8811	14.05.2019	docx 15.49 KB

CAD/CAE-Data

CAD data

2D/3D Models 2007-8811

CAE data

EPLAN Data Portal 2007-8811

WSCAD Universe 2007-8811

ZUKEN Portal 2007-8811

1 Compatible Products

1.1 Required Accessories

1.1.1 End plate

1.1.1.1 End plate



Item No.: 2007-8893
End plate; 1.5 mm thick; with lock-out seal option; gray



Item No.: 2007-8894
End plate; 1.5 mm thick; with lock-out seal option; orange



Item No.: 2007-8891
End plate; 1.5 mm thick; without lock-out seal option; gray



Item No.: 2007-8892
End plate; 1.5 mm thick; without lock-out seal option; orange

1.2 Optional Accessories

1.2.1 DIN-rail

1.2.1.1 Mounting accessories



Item No.: 210-196
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



Item No.: 210-198
Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored



Item No.: 210-197
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored



Item No.: 210-114
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



Item No.: 210-118
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



Item No.: 210-115
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored



Item No.: 210-112
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored



Item No.: 210-113
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

Continued on next page

1.2.2 Installation

1.2.2.1 Cover

Item No.: 709-156
Cover; Type 3; suitable for cover carrier, type 3; 1 m long; transparent

1.2.2.2 Cover carrier



Item No.: 709-169
Cover carrier; Type 3; incl. fixing/retaining screws and knurled nut; suitable for 279 to 282 and 880 Series rail-mounted terminal blocks; suitable for 264 Series miniature rail-mounted terminal blocks; suitable for 270 Series sensor and actuator terminal blocks; gray

1.2.3 Jumper

1.2.3.1 Jumper



Item No.: 282-440
Jumper; 10-way; insulated; orange



Item No.: 282-432
Jumper; 2-way; insulated; orange



Item No.: 282-432/100-000
Jumper; 2-way; insulated; orange



Item No.: 282-433
Jumper; 3-way; insulated; orange



Item No.: 282-433/100-000
Jumper; 3-way; insulated; orange



Item No.: 282-434
Jumper; 4-way; insulated; orange



Item No.: 282-434/100-000
Jumper; 4-way; insulated; orange



Item No.: 282-435
Jumper; 5-way; insulated; orange



Item No.: 282-436
Jumper; 6-way; insulated; orange



Item No.: 282-437
Jumper; 7-way; insulated; orange



Item No.: 282-438
Jumper; 8-way; insulated; orange



Item No.: 282-439
Jumper; 9-way; insulated; orange



Item No.: 282-435/011-000
Jumper; insulated; orange



Item No.: 282-435/300-000
Jumper; insulated; orange



Item No.: 282-435/301-000
Jumper; insulated; orange



Item No.: 282-436/301-000
Jumper; insulated; orange



Item No.: 282-436/304-000
Jumper; insulated; orange



Item No.: 282-437/011-000
Jumper; insulated; orange



Item No.: 282-437/012-000
Jumper; insulated; orange



Item No.: 282-438/300-000
Jumper; insulated; orange



Item No.: 282-438/301-000
Jumper; insulated; orange



Item No.: 282-439/011-000
Jumper; insulated; orange

Continued on next page

1.2.4 Locking system

1.2.4.1 Locking system



Item No.: 210-254
Interlocking link; mechanically locks multiple links; 1 m long; transparent



Item No.: 282-881
Locking cover; mechanically locks multiple links; 1-pole; transparent



Item No.: 282-882
Locking cover; mechanically locks multiple links; 2-pole; transparent



Item No.: 282-883
Locking cover; mechanically locks multiple links; 3-pole; transparent



Item No.: 282-884
Locking cover; mechanically locks multiple links; 4-pole; transparent



Item No.: 282-885
Locking cover; mechanically locks multiple links; 5-pole; transparent



Item No.: 282-886
Locking cover; mechanically locks multiple links; 6-pole; transparent



Item No.: 282-887
Locking cover; mechanically locks multiple links; 7-pole; transparent



Item No.: 282-888
Locking cover; mechanically locks multiple links; 8-pole; transparent

1.2.5 Lock-out

1.2.5.1 Locking system



Item No.: 2007-8899
Lock-out; for disconnect link; yellow

1.2.6 Marking

1.2.6.1 Marker



Item No.: 793-501/000-006
WMB marking card; as card; not stretchable; plain; snap-on type; blue



Item No.: 793-501/000-007
WMB marking card; as card; not stretchable; plain; snap-on type; gray



Item No.: 793-501/000-023
WMB marking card; as card; not stretchable; plain; snap-on type; green



Item No.: 793-501/000-017
WMB marking card; as card; not stretchable; plain; snap-on type; light green



Item No.: 793-501/000-012
WMB marking card; as card; not stretchable; plain; snap-on type; orange



Item No.: 793-501/000-005
WMB marking card; as card; not stretchable; plain; snap-on type; red



Item No.: 793-501/000-024
WMB marking card; as card; not stretchable; plain; snap-on type; violet

Item No.: 793-501
WMB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 793-501/000-002
WMB marking card; as card; not stretchable; plain; snap-on type; yellow



Item No.: 2009-115/000-006
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue



Item No.: 2009-115/000-007
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray



Item No.: 2009-115/000-023
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green



Item No.: 2009-115/000-017
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green



Item No.: 2009-115/000-012
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



Item No.: 2009-115/000-024
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet



Item No.: 2009-115
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 2009-115/000-002
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

Continued on next page

1.2.6.2 Marker carrier



Item No.: 2009-198
Adaptor; gray

1.2.6.3 Marking strip



Item No.: 2009-110
Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

1.2.7 Protective warning marker

1.2.7.1 Cover



Item No.: 2006-115
Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

1.2.8 Screwless end stop

1.2.8.1 Mounting accessories



Item No.: 249-117
Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-116
Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

1.2.9 Tool


1.2.9.1 Operating tool



Item No.: 210-721
Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured


Installation Notes

Commoning




Additional commoning option on the transformer side

Security



Lock-out prevents accidental operation of disconnect link.




Lock-out snaps into one of two notched positions.

Locking system




Using locking covers or profiles for adjacent terminal blocks allows disconnect links to be operated simultaneously.



A lock-out seal can be used on the disconnect link in operating position I when combined with an end and separator plate (Item No. 2007-8893 or Item No. 2007-8894).




Interlocking link mechanically locks multiple links for multi-pole switching applications.



Disconnect/Test Terminal Block (2007-8811)




Example for voltage transformer testing
Measuring set for single-phase voltage transformer testing
Terminal blocks required:
1 x disconnect/test terminal block (2007-8811)
1 x through terminal block (2007-8801)
1 x end plate, orange (2007-8892)
In addition: locking cover, lock-out



Disconnecting the voltage transformer from the circuit: Move disconnect link from operating position to measurement position.
Voltage measurement: Connecting a measurement device via test socket on the meter side can only be performed after disconnection is complete (measuring point).

Marking



Marking via WMB Multi markers or marking strips.