




Color:  white

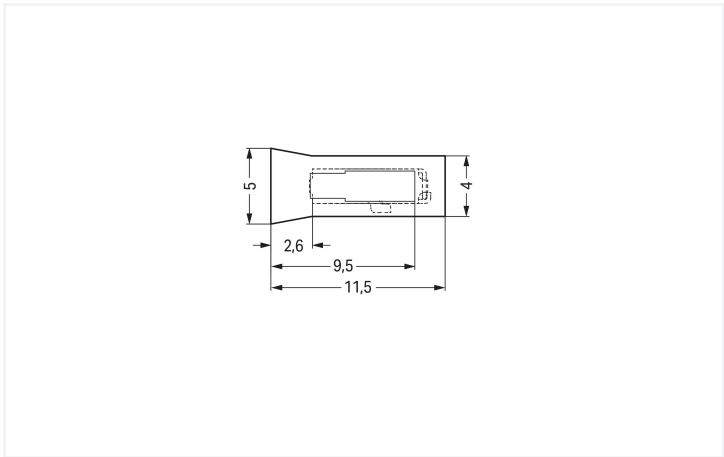

Dimensions in mm  
Required space for operating tool

| Mechanical data |                 |
|-----------------|-----------------|
| Suitable        | for 2065 Series |
| Design          | insulated       |

| Material data |          |
|---------------|----------|
| Color         | white    |
| Fire load     | 0.028 MJ |
| Weight        | 1.6 g    |

| Commercial data       |               |
|-----------------------|---------------|
| PU (SPU)              | 600 (50) pcs  |
| Packaging type        | Box           |
| Country of origin     | DE            |
| GTIN                  | 4055143634571 |
| Customs tariff number | 39269097900   |

| Product Classification |                      |
|------------------------|----------------------|
| UNSPSC                 | 27111601             |
| eCl@ss 10.0            | 27-14-11-92          |
| eCl@ss 9.0             | 27-14-11-92          |
| ETIM 9.0               | EC002848             |
| ETIM 10.0              | EC002848             |
| ECCN                   | NO US CLASSIFICATION |



| Environmental Product Compliance |                         |
|----------------------------------|-------------------------|
| RoHS Compliance Status           | Compliant, No Exemption |

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2065-189

↓

CAD/CAE-Data

CAD data

2D/3D Models 2065-189


↓

CAE data

ZUKEN Portal 2065-189

↓

Installation Notes



The 2065-189 Operating Tool's funneled conductor entry securely guides all conductor types into the Push-in CAGE CLAMP®.