


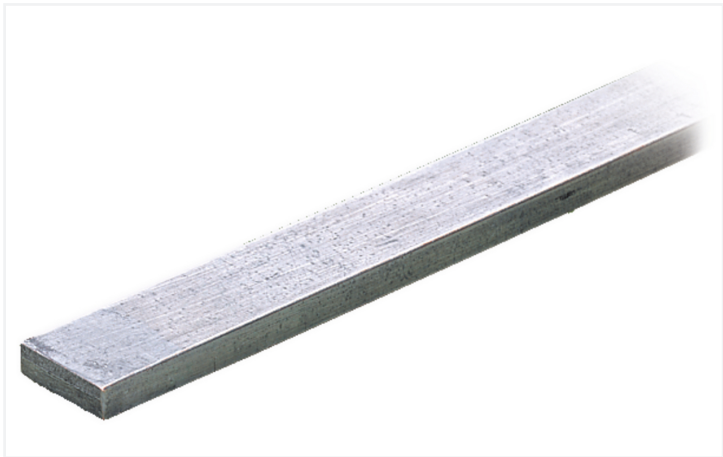

Color: white

Electrical data		
Rated current		140 A

Physical data		
Length		1000 mm

Material data		
Color		white
Weight		266 g

Commercial data		
PU (SPU)		1 pcs
Packaging type		Box
Country of origin		DE
GTIN		4045454229443
Customs tariff number		7407100000

Product Classification		
UNSPSC		39121613
eCl@ss 10.0		27-14-11-39
eCl@ss 9.0		27-14-11-39
ETIM 9.0		EC000485
ETIM 10.0		EC000485
ECCN		NO US CLASSIFICATION

Environmental Product Compliance

Environmental Product Compliance 210-133



Bid Text

210-133	19.02.2019	xml 2.54 KB	
210-133	23.11.2018	docx 13.39 KB	

CAD data

2D/3D Models Z10-133 ↓

CAE data

EPLAN Data Portal 210-133	
WSCAD Universe 210-133	
ZUKEN Portal 210-133	

1.1 Optional Accessories

1.1.1 Cover

1.1.1.1 Cover



Item No.: 777-303

N-busbar cover; 1000 mm long; transparent

1.1.2 N-busbar

1.1.2.1 Busbar terminal block



Item No.: 210-281

Connector; blue



Item No.: 209-105

Connector; silver-colored

1.1.3 Shield termination

1.1.3.1 Shield clamping saddles



Item No.: 790-108

Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm



Item No.: 790-208

Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm



Item No.: 790-116

Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm



Item No.: 790-216

Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm



Item No.: 790-124

Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm



Item No.: 790-220

Shield clamping saddle; 30 mm wide; 6 ... 20 mm



Item No.: 790-140

Shield clamping saddle; diameter of compatible conductor

1.1.3.2 Shield termination



Item No.: 791-107

Shield clamp; diameter of compatible conductor; 1.5 mm to 6.5 mm; H max. 40 mm; 20 mm wide



Item No.: 791-117

Shield clamp; diameter of compatible conductor; 10 mm to 17 mm; H max. 63 mm; 23 mm wide



Item No.: 791-124

Shield clamp; diameter of compatible conductor; 16 mm to 24 mm; H max. 78 mm; 30 mm wide



Item No.: 791-111

Shield clamp; diameter of compatible conductor; 5 mm to 11 mm; H max. 47 mm; 17 mm wide



Item No.: 790-398

T-connector; for busbars Cu 10 mm x 3 mm; silver-colored

1.1.4 Terminal blocks

1.1.4.1 Common potential terminal block



Item No.: 812-111

Busbar terminal block; for (10 x 3) mm busbars; without push-buttons; CAGE CLAMP®; 16,00 mm²; light gray



Item No.: 812-114

Busbar terminal block; for (10 x 3) mm busbars; without push-buttons; CAGE CLAMP®; blue



Item No.: 812-112

Busbar terminal block; for (10 x 3) mm busbars; without push-buttons; CAGE CLAMP®; dark gray



Item No.: 812-113

Busbar terminal block; for (10 x 3) mm busbars; without push-buttons; CAGE CLAMP®; red



Item No.: 812-104

Busbar terminal block; for (10 x 3) mm busbars; without push-buttons; Push-in CAGE CLAMP®; 4,00 mm²; blue



Item No.: 812-101

Busbar terminal block; for (10 x 3) mm busbars; without push-buttons; Push-in CAGE CLAMP®; 4,00 mm²; light gray



Item No.: 812-102

Busbar terminal block; for (10 x 3) mm busbars; without push-buttons; Push-in CAGE CLAMP®; dark gray



Item No.: 812-103

Busbar terminal block; for (10 x 3) mm busbars; without push-buttons; Push-in CAGE CLAMP®; red



Item No.: 812-110

Ground busbar terminal block; for (10 x 3) mm busbars; CAGE CLAMP®; green-yellow



Item No.: 812-100

Ground busbar terminal block; for (10 x 3) mm busbars; Push-in CAGE CLAMP®; 4,00 mm²; green-yellow