

Data Sheet | Item Number: 210-196

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

https://www.wago.com/210-196

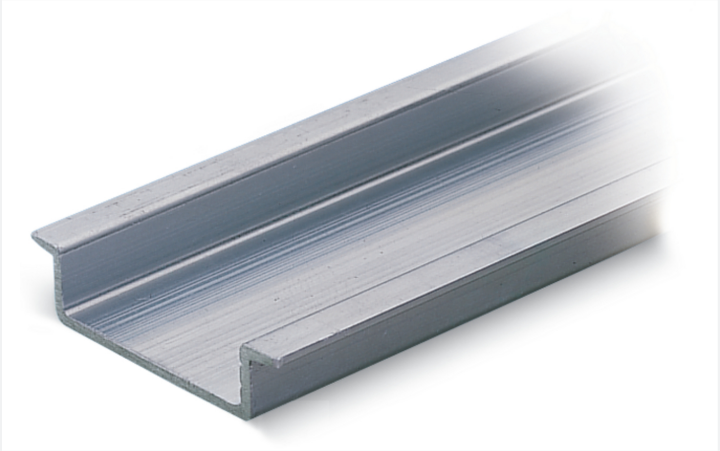

Color: silver-colored

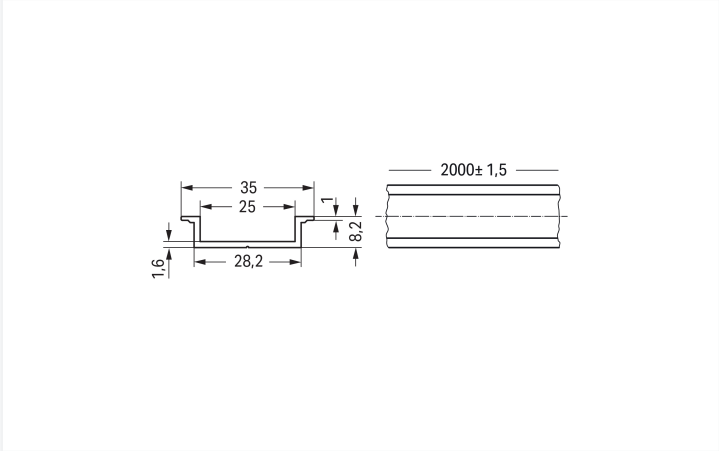

Dimensions in mm

Physical data	
Width	2000 mm / 78.74 inches
Height	8.2 mm / 0.323 inches
Depth	35 mm / 1.378 inches

Material data	
Color	silver-colored
Weight	400 g
Material	Aluminum (Al Mg Si)

Commercial data	
Product Group	2 (Terminal Block Accessories)
PU (SPU)	20 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332272315
Customs tariff number	76042990900

Product Classification	
UNSPSC	39121702
eCl@ss 10.0	27-40-06-02
eCl@ss 9.0	27-40-06-02
ETIM 9.0	EC001285
ETIM 10.0	EC001285
ECCN	NO US CLASSIFICATION

Continued on next page

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 210-196

Documentation

Bid Text

210-196	19.02.2019	xml 2.65 KB
210-196	31.08.2017	doc 24.00 KB

CAD/CAE-Data

CAD data

2D/3D Models 210-196

CAE data

EPLAN Data Portal 210-196

WSCAD Universe 210-196

ZUKEN Portal 210-196

1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Mounting accessories

Item No.: 209-137
Mounting adapter; can be used as end stop; 6.5 mm wide; gray



Item No.: 249-117
Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-197
Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-116
Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

Continued on next page

1.1.2 Marking

1.1.2.1 Label



Item No.: 210-808
Labels; for Smart Printer; 9.5 x 25 mm; white

Item No.: 210-708
Labels; for TP printers; 9.5 x 25 mm; white

Installation Notes

DIN-Rail	Item No.	Current [A]	Acc. to mm²/AWG/Cu
DIN 35 x 7.5 (steel)			
slotted	210-112	76	16/6
unslotted	210-113	76	16/6
DIN 35 x 15 (steel)			
1.5 mm thick	210-114	125	35/2
2.3 mm thick	210-118	125	35/2
DIN 35 x 7.5 (Al)			
unslotted	210-196	76	16/6
DIN 35 x 15 (Cu)			
2.3 mm thick	210-198	309	150/6/0

Current applies to rails of 1 m/3'3" length

When using standard DIN-rails as ground conductor busbars, please refer to the maximum current capacities listed above.
Steel DIN-rails are not suited for PEN (ground and N-conductor) applications per EN 60947-7-2 (VDE 0611, Part 3).