Data Sheet | Item Number: 216-289


Ferrule; Sleeve for 10 mm² / AWG 8; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red

https://www.wago.com/216-289



Color: red

Similar to illustration

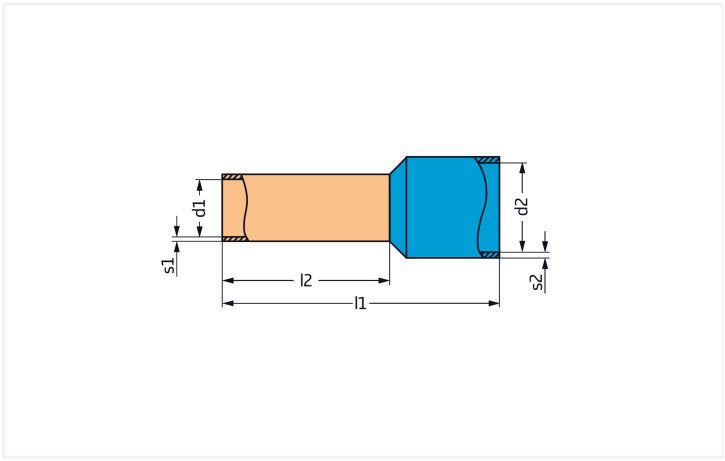

Dimensions in mm

Connection Data	
Metric cross-section of the ferrule	10 mm²
Strip length	20 … 21 mm / 0.79 … 0.83 inches
Cross-section (AWG) of ferrule	8 AWG

Physical data	
Total length (L)	28 mm
Wall thickness of crimp sleeve (W2)	0.2 mm
Wall thickness (plastic collar W1)	0.4 mm
Crimp length (length of sleeve L1)	18 mm
Inner diameter of plastic collar (D1)	7.6 mm
Diameter crimp sleeve inside (D2)	4.5 mm

Mechanical data	
Plastic collar	Standard collar
Suitable	2010 to 2016 Series

Material data	
Color	red
Weight	0.7 g

Commercial data

Product Group	2 (Terminal Block Accessories)
PU (SPU)	100 pcs
Packaging type	Bag
Country of origin	DE
GTIN	4055143654777
Customs tariff number	85369010000

Product Classification

UNSPSC	39121405
eCl@ss 10.0	27-40-02-01
eCl@ss 9.0	27-40-02-01
ETIM 9.0	EC000005
ETIM 10.0	EC000005
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search


Environmental Product Compliance 216-289

Documentation

Bid Text

216-289	11.09.2017	doc 24.50 KB	
216-289	19.02.2019	xml 2.80 KB	

Installation Notes



A perfect gas-tight crimp – both electrically and mechanically reliable