

# Data Sheet | Item Number: 2626-3107/020-000


PCB terminal block; 6 mm²; Pin spacing 7.5 mm; 7-pole; Push-in CAGE CLAMP®; 6,00 mm²; gray

https://www.wago.com/2626-3107/020-000

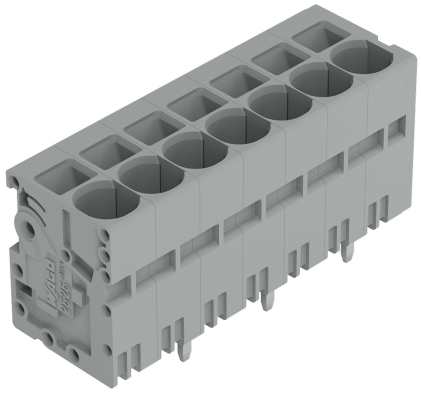

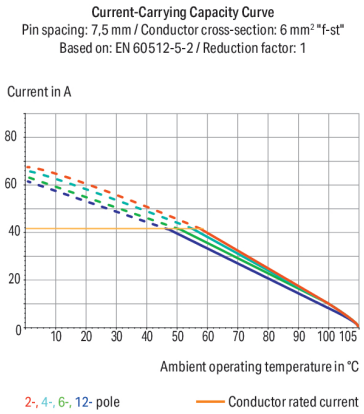


Color: gray

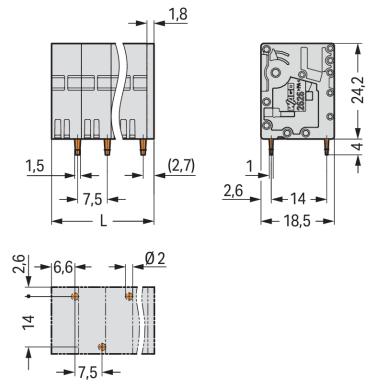


Dimensions in mm
L = (pole no. – 1) x pin spacing + 9.3 mm

PCB terminal block, 2626 Series, Push-in CAGE CLAMP®

This PCB terminal block (item number 2626-3107/020-000) is designed for easy and secure connections. It is a universal connector that can be used almost anywhere, e.g., as a pluggable PCB connector, panel feedthrough header, connector for rail-mount terminal blocks, or a floating connector for different mounting methods. Ensure that the strip lengths are between 13 and 15 mm when connecting conductors to this PCB terminal block. This product features one conductor terminal and utilizes Push-in CAGE CLAMP®. Our Push-in CAGE CLAMP® is a universal, maintenance-free connection solution for all conductor types, offering a key advantage: both solid and fine-stranded conductors with ferrules can be directly inserted without the need for tools or any preparation, such as crimping the ferrule. The item's dimensions are (54.3 x 28.2 x 18.5) mm (width x height x depth). Depending on the type of conductor, this PCB terminal block is suitable for conductor cross sections ranging from 0.2 mm² to 10 mm².

The contact surface is coated with tin. An operating tool is used to operate this PCB terminal block. The PCB terminal block is designed for THT soldering. Insert the conductor into the board at a 90° angle..

## Notes

| | |
|---|---|
| General safety information | **NOTICE: Observe installation and safety instructions!**<br><br>**To be sold only with installation instructions!** |
| Variants: | Other pole numbers<br>Direct marking<br>Other colors<br>Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/. |

## Electrical data

| Ratings per | IEC/EN 60664-1 | | |
|---|---|---|---|
| Overvoltage category | III | III | II |
| Pollution degree | 3 | 2 | 2 |
| Nominal voltage | 1000 V | 1000 V | 1000 V |
| Rated impulse withstand voltage | 8 kV | 8 kV | 8 kV |
| Rated current | 48 A | 48 A | 48 A |

| Approvals per | UL 1059 | | |
|---|---|---|---|
| Use group | B | C | D |
| Rated voltage | 600 V | 600 V | - |
| Rated current | 38 A | 38 A | - |

| Approvals per | CSA | | |
|---|---|---|---|
| Use group | B | C | D |
| Rated voltage | 600 V | 600 V | - |
| Rated current | 31 A | 38 A | - |

## Connection Data

| | |
|---|---|
| Clamping units | 7 |
| Total number of potentials | 7 |
| Number of connection types | 1 |
| Number of levels | 1 |

### Connection 1

| | |
|---|---|
| Connection technology | Push-in CAGE CLAMP® |
| Actuation type | Operating tool |
| Solid conductor | 0.2 … 10 mm² / 24 … 8 AWG |
| Fine-stranded conductor | 0.2 … 10 mm² / 24 … 8 AWG |
| Fine-stranded conductor; with insulated ferrule | 0.25 … 6 mm² |
| Fine-stranded conductor; with uninsulated ferrule | 0.25 … 6 mm² |
| Fine-stranded conductor; with twin ferrule | 0.25 … 2.5 mm² |
| Strip length | 13 … 15 mm / 0.51 … 0.59 inches |
| Conductor connection direction to PCB | 90 ° |
| Pole number | 7 |

## Physical data

| | |
|---|---|
| Pin spacing | 7.5 mm / 0.295 inches |
| Width | 54.3 mm / 2.138 inches |
| Height | 28.2 mm / 1.11 inches |
| Height from the surface | 24.2 mm / 0.953 inches |
| Depth | 18.5 mm / 0.728 inches |
| Solder pin length | 4 mm |
| Solder pin dimensions | 1.5 x 1 mm |
| Drilled hole diameter | 2 $^{(+0.1)}$ mm |


Continued on next page

## Mechanical data

| | |
|---|---|
| Mounting type | Feed-through mounting |
| Suitable for through-panel applications | Yes |

## PCB contact

| | |
|---|---|
| PCB contact | THT |
| Solder pin arrangement | over the entire terminal strip (staggered) |
| Number of solder pins per potential | 1 |

## Material data

| | |
|---|---|
| Note (material data) | Information on material specifications can be found here |
| Color | gray |
| Material group | I |
| Insulation material (main housing) | Polyamide (PA66) |
| Flammability class per UL94 | V0 |
| Clamping spring material | Chrome-nickel spring steel (CrNi) |
| Contact material | Electrolytic copper ($E_{Cu}$) |
| Contact Plating | Tin |
| Fire load | 0.324 MJ |
| Weight | 26.6 g |

## Environmental requirements

| | |
|---|---|
| Limit temperature range | -60 … +105 °C |
| Processing temperature | -35 … +60 °C |
| Continuous operating temperature | -60 … +105 °C |

## Commercial data

| | |
|---|---|
| PU (SPU) | 27 pcs |
| Packaging type | Box |
| Country of origin | PL |
| GTIN | 4066966505580 |
| Customs tariff number | 85369010000 |

## Product Classification

| | |
|---|---|
| UNSPSC | 39121409 |
| eCl@ss 10.0 | 27-44-04-01 |
| eCl@ss 9.0 | 27-44-04-01 |
| ETIM 9.0 | EC002643 |
| ETIM 10.0 | EC002643 |
| ECCN | NO US CLASSIFICATION |


Continued on next page

## Environmental Product Compliance

| | |
|---|---|
| RoHS Compliance Status | Compliant,No Exemption |

## Approvals / Certificates

### General approvals

| Approval | Standard | Certificate Name |
|---|---|---|
| CB<br>DEKRA Certification B.V. | IEC 60947-7-4 | NL-103311 |
| CSA<br>CSA Group | C22.2 | 70146882 |
| KEMA/KEUR<br>DEKRA Certification B.V. | EN 60947-7-4 | 71-113203 |
| UL<br>Underwriters Laboratories Inc. | UL 1059 | E45172 |

## Downloads

### Environmental Product Compliance

**Compliance Search**

Environmental Product Compliance
2626-3107/020-000

### Documentation

**Safety Data Sheet**

| | | |
|---|---|---|
| Handling and Safety Instructions of PCB Terminal Blocks with Push-In Cage Clamp | pdf<br>393.90 KB | |

**Additional Information**

| | | |
|---|---|---|
| Technical Section | 03.04.2019 | pdf<br>2027.26 KB |

### CAD/CAE-Data

**CAD data**

2D/3D Models
2626-3107/020-000

**CAE data**

ZUKEN Portal
2626-3107/020-000

**PCB Design**

Symbol and Footprint via SamacSys
2626-3107/020-000

Symbol and Footprint via Ultra Librarian
2626-3107/020-000


Continued on next page

## 1 Compatible Products

### 1.1 Optional Accessories

#### 1.1.1 Tool

##### 1.1.1.1 Operating tool



Item No.: 210-721
Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured

## Installation Notes

### Conductor termination



Insert fine-stranded conductors and remove all conductor types via operating tool.

### Conductor termination



Insert solid conductors via push-in termination.