

# Data Sheet | Item Number: 2626-3108/020-000


PCB terminal block; 6 mm²; Pin spacing 7.5 mm; 8-pole; Push-in CAGE CLAMP®; 6,00 mm²; gray

https://www.wago.com/2626-3108/020-000

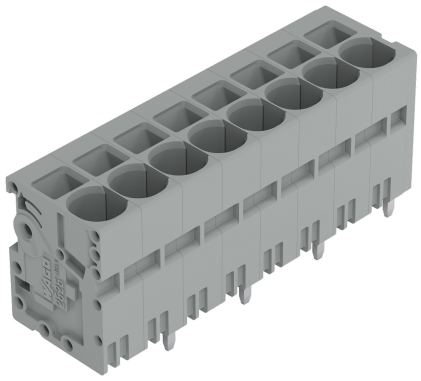

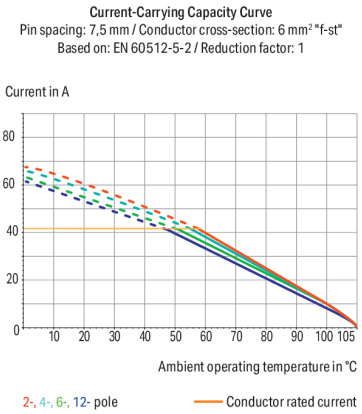


Color: gray

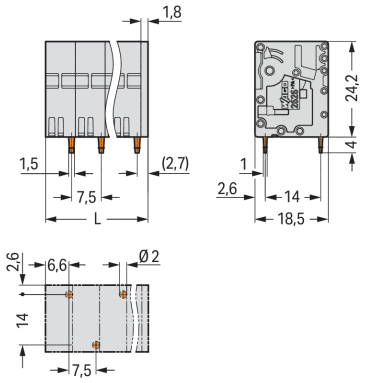


Dimensions in mm
L = (pole no. – 1) x pin spacing + 9.3 mm

PCB terminal block, 2626 Series, solder pin dimensions 1.5 x 1 mm

Easily, quickly and safely connect conductors with this PCB terminal block (item number 2626-3108/020-000). You can rely on tried and tested safety with these PCB terminal blocks, perfect for a wide range of applications when designing your devices. Conductors can only be connected to this PCB terminal block if their strip length is between 13 and 15 mm . This product features one conductor terminal and utilizes Push-in CAGE CLAMP®. Push-in CAGE CLAMP® technology provides a universal connection solution for any type of conductor. It allows both solid and fine-stranded conductors with ferrules to be inserted directly into the clamping point without the need for tools. The item's dimensions are (61.8 x 28.2 x 18.5) mm (width x height x depth). This PCB terminal block is suitable for conductor cross sections ranging from 0.2 mm² to 10 mm².

Tin is used for coating the contact surfaces. An operating tool is used to operate this PCB terminal block. THT is used to assemble the PCB terminal block. The conductor is designed to be inserted into the board at an angle of 90°..

## Notes

| | |
|---|---|
| General safety information | **NOTICE: Observe installation and safety instructions!**<br><br>**To be sold only with installation instructions!** |
| Variants: | Other pole numbers<br>Direct marking<br>Other colors<br>Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/. |

## Electrical data

| Ratings per | IEC/EN 60664-1 | | |
|---|---|---|---|
| Overvoltage category | III | III | II |
| Pollution degree | 3 | 2 | 2 |
| Nominal voltage | 1000 V | 1000 V | 1000 V |
| Rated impulse withstand voltage | 8 kV | 8 kV | 8 kV |
| Rated current | 48 A | 48 A | 48 A |

| Approvals per | UL 1059 | | |
|---|---|---|---|
| Use group | B | C | D |
| Rated voltage | 600 V | 600 V | - |
| Rated current | 38 A | 38 A | - |

| Approvals per | CSA | | |
|---|---|---|---|
| Use group | B | C | D |
| Rated voltage | 600 V | 600 V | - |
| Rated current | 31 A | 38 A | - |

## Connection Data

| | |
|---|---|
| Clamping units | 8 |
| Total number of potentials | 8 |
| Number of connection types | 1 |
| Number of levels | 1 |

### Connection 1

| | |
|---|---|
| Connection technology | Push-in CAGE CLAMP® |
| Actuation type | Operating tool |
| Solid conductor | 0.2 … 10 mm² / 24 … 8 AWG |
| Fine-stranded conductor | 0.2 … 10 mm² / 24 … 8 AWG |
| Fine-stranded conductor; with insulated ferrule | 0.25 … 6 mm² |
| Fine-stranded conductor; with uninsulated ferrule | 0.25 … 6 mm² |
| Fine-stranded conductor; with twin ferrule | 0.25 … 2.5 mm² |
| Strip length | 13 … 15 mm / 0.51 … 0.59 inches |
| Conductor connection direction to PCB | 90 ° |
| Pole number | 8 |

## Physical data

| | |
|---|---|
| Pin spacing | 7.5 mm / 0.295 inches |
| Width | 61.8 mm / 2.433 inches |
| Height | 28.2 mm / 1.11 inches |
| Height from the surface | 24.2 mm / 0.953 inches |
| Depth | 18.5 mm / 0.728 inches |
| Solder pin length | 4 mm |
| Solder pin dimensions | 1.5 x 1 mm |
| Drilled hole diameter | 2 $^{(+0.1)}$ mm |


Continued on next page

## Mechanical data

| | |
|---|---|
| Mounting type | Feed-through mounting |
| Suitable for through-panel applications | Yes |

## PCB contact

| | |
|---|---|
| PCB contact | THT |
| Solder pin arrangement | over the entire terminal strip (staggered) |
| Number of solder pins per potential | 1 |

## Material data

| | |
|---|---|
| Note (material data) | Information on material specifications can be found here |
| Color | gray |
| Material group | I |
| Insulation material (main housing) | Polyamide (PA66) |
| Flammability class per UL94 | V0 |
| Clamping spring material | Chrome-nickel spring steel (CrNi) |
| Contact material | Electrolytic copper ($E_{Cu}$) |
| Contact Plating | Tin |
| Fire load | 0.368 MJ |
| Weight | 30.4 g |

## Environmental requirements

| | |
|---|---|
| Limit temperature range | -60 … +105 °C |
| Processing temperature | -35 … +60 °C |
| Continuous operating temperature | -60 … +105 °C |

## Commercial data

| | |
|---|---|
| PU (SPU) | 27 pcs |
| Packaging type | Box |
| Country of origin | PL |
| GTIN | 4066966505474 |
| Customs tariff number | 85369010000 |

## Product Classification

| | |
|---|---|
| UNSPSC | 39121409 |
| eCl@ss 10.0 | 27-44-04-01 |
| eCl@ss 9.0 | 27-44-04-01 |
| ETIM 9.0 | EC002643 |
| ETIM 10.0 | EC002643 |
| ECCN | NO US CLASSIFICATION |


Continued on next page

## Environmental Product Compliance

| | |
|---|---|
| RoHS Compliance Status | Compliant,No Exemption |

## Approvals / Certificates

### General approvals

| Approval | Standard | Certificate Name |
|---|---|---|
| CB<br>DEKRA Certification B.V. | IEC 60947-7-4 | NL-103311 |
| CSA<br>CSA Group | C22.2 | 70146882 |
| KEMA/KEUR<br>DEKRA Certification B.V. | EN 60947-7-4 | 71-113203 |
| UL<br>Underwriters Laboratories Inc. | UL 1059 | E45172 |

## Downloads

### Environmental Product Compliance

**Compliance Search**

Environmental Product Compliance
2626-3108/020-000

### Documentation

**Safety Data Sheet**

| | | |
|---|---|---|
| Handling and Safety Instructions of PCB Terminal Blocks with Push-In Cage Clamp | pdf<br>393.90 KB | |

**Additional Information**

| | | |
|---|---|---|
| Technical Section | 03.04.2019 | pdf<br>2027.26 KB |

### CAD/CAE-Data

**CAD data**

2D/3D Models
2626-3108/020-000

**CAE data**

ZUKEN Portal
2626-3108/020-000

**PCB Design**

Symbol and Footprint via SamacSys
2626-3108/020-000

Symbol and Footprint via Ultra Librarian
2626-3108/020-000


Continued on next page

## 1 Compatible Products

### 1.1 Optional Accessories

#### 1.1.1 Tool

##### 1.1.1.1 Operating tool



Item No.: 210-721
Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured

## Installation Notes

### Conductor termination



Insert fine-stranded conductors and remove all conductor types via operating tool.

### Conductor termination



Insert solid conductors via push-in termination.