

# Data Sheet | Item Number: 267-304

Conductor support; with direct ground contact; with snap-in mounting feet; 4-pole; white

https://www.wago.com/267-304

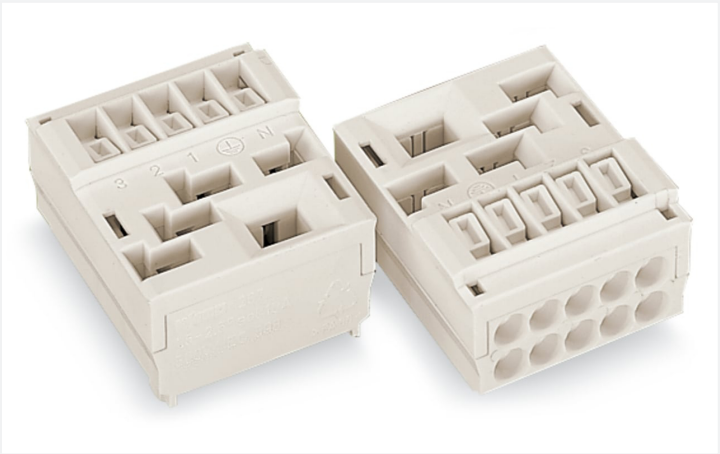

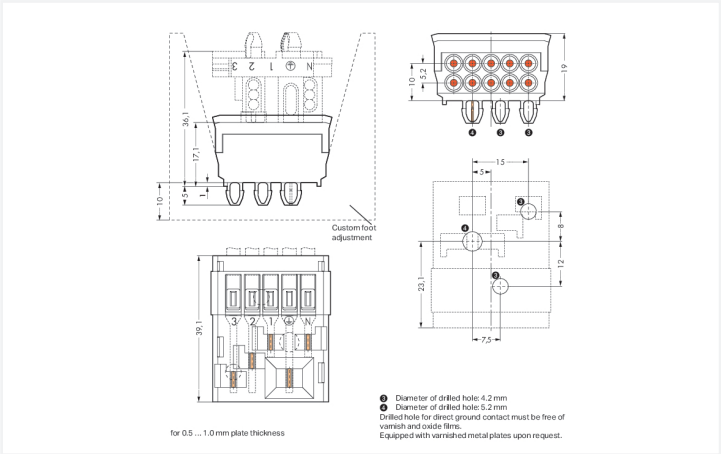


Color: white

Similar to illustration

Dimensions in mm
3) Drilled hole diameter: 4.2 mm4) Drilled hole diameter: 5.2 mmDrilled hole for direct PE contact must be free of varnish and oxide films.Equipped with varnished metal plates upon request.

Conductor support, 267 Series, white

Enjoy easy electrical installations with conductor support (item number 267-304). Conductors can only be connected to conductor support if their strip length is between 11 and 12 mm . Depending on the conductor type, conductor support is designed for conductor cross sections ranging from 0.5 mm² to 1 mm².

Tin is used for coating the contact surfaces.

- Compact sizes
- Ready to install, immediately usable

## Electrical data

| Ratings per | IEC/EN 60664-1 | | |
|---|---|---|---|
| Overvoltage category | III | III | II |
| Pollution degree | 3 | 2 | 2 |
| Nominal voltage | - | 500 V | - |
| Rated impulse withstand voltage | - | 4 kV | - |
| Rated current | - | 16 A | - |

| Ratings per IEC/EN 2 | |
|---|---|
| Rated current | 6 A |

## Connection Data

| | |
|---|---|
| Number of connection types | 1 |

| Connection 1 | |
|---|---|
| Solid conductor | 0.5 … 1 mm² |
| Strip length | 11 … 12 mm / 0.43 … 0.47 inches |
| Pole number | 4 |

## Physical data

| | |
|---|---|
| Width | 39.1 mm / 1.539 inches |
| Height from the surface | 19 mm / 0.748 inches |

## Material data

| | |
|---|---|
| Note (material data) | Information on material specifications can be found here |
| Color | white |
| Material group | I |
| Insulation material (main housing) | Polyamide (PA66) |
| Flammability class per UL94 | V0 |
| Clamping spring material | Chrome-nickel spring steel (CrNi) |
| Contact material | Electrolytic copper ($E_{Cu}$) |
| Contact Plating | Tin |
| Fire load | 0.291 MJ |
| Weight | 17.9 g |

## Environmental requirements

| | |
|---|---|
| Temperature stability | 105 °C |

## Commercial data

| | |
|---|---|
| PU (SPU) | 50 pcs |
| Packaging type | Box |
| Country of origin | PL |
| GTIN | 4045454415426 |
| Customs tariff number | 85366990990 |

## Product Classification

| | |
|---|---|
| UNSPSC | 39121409 |
| eCl@ss 10.0 | 27-44-03-14 |
| eCl@ss 9.0 | 27-44-03-14 |
| ETIM 9.0 | EC002560 |
| ETIM 10.0 | EC002560 |
| ECCN | NO US CLASSIFICATION |

## Environmental Product Compliance

| | |
|---|---|
| RoHS Compliance Status | Compliant,No Exemption |

## Approvals / Certificates

### General approvals

| Approval | Standard | Certificate Name |
|---|---|---|
| UL<br>Underwriters Laboratories Inc. | UL 1977 | UL-US-L45171-12-52204002 |
| VDE<br>VDE Prüf- und Zertifizierungsinstitut | EN 61984 | 40032309 |


Continued on next page

## Downloads

### Environmental Product Compliance

**Compliance Search**

Environmental Product Compliance 267-304

### Documentation

**Additional Information**

| | | |
|---|---|---|
| Technical Section | 03.04.2019 | pdf 2027.26 KB |

### CAD/CAE-Data

**CAD data**

2D/3D Models 267-304

**CAE data**

ZUKEN Portal 267-304