Data Sheet | Item Number: 267-314

Conductor support; without ground contact; with snap-in mounting feet; 4-pole; white

https://www.wago.com/267-314



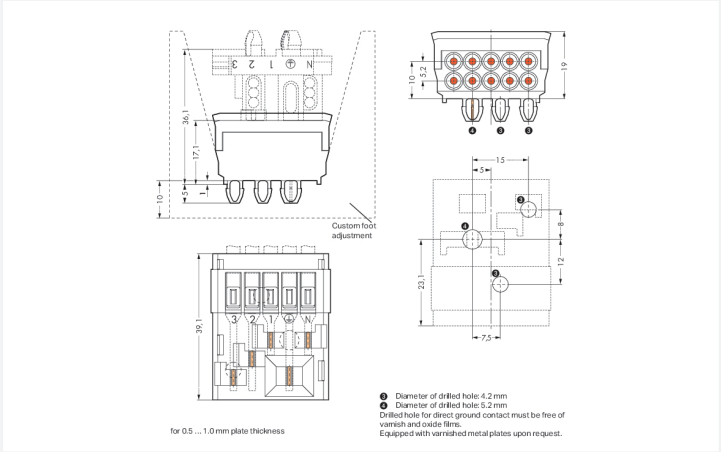

Color: white

Similar to illustration

Dimensions in mm
3) Drilled hole diameter: 4.2 mm4) Drilled hole diameter: 5.2 mmDrilled hole for direct PE contact must be free of varnish and oxide films.Equipped with varnished metal plates upon request.

Conductor support, 267 Series, white

Seamless electrical installations are guaranteed with conductor support (item number 267-314). Ensure that the strip lengths are between 11 and 12 mm when connecting conductors to conductor support. Depending on the type of conductor, conductor support is suitable for conductor cross sections ranging from 0.5 mm² to 1 mm².

Tin is used for coating the contact surfaces.

- Safe and fast installation
- Compact sizes

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated impulse withstand voltage	-	4 kV	-
Rated current	-	16 A	-

Ratings per IEC/EN 2	
Rated current	6 A

Connection Data

Number of connection types	1

Connection 1	
Solid conductor	0.5 … 1 mm²
Strip length	11 … 12 mm / 0.43 … 0.47 inches
Pole number	4

Physical data

Width	39.1 mm / 1.539 inches
Height from the surface	19 mm / 0.748 inches

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E_{Cu})
Contact Plating	Tin
Fire load	0.291 MJ
Weight	16.9 g

Environmental requirements

Processing temperature	-35 … +85 °C
Continuous operating temperature	-60 … +105 °C
Temperature stability	105 °C

Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	PL
GTIN	4045454415457
Customs tariff number	85366990990

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Continued on next page

Approvals / Certificates

General approvals

Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc.	UL 1977	UL-US-L45171-12-52204002
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 267-314

Documentation

Additional Information

Technical Section	03.04.2019	pdf 2027.26 KB

CAD/CAE-Data

CAD data

2D/3D Models 267-314

CAE data

ZUKEN Portal 267-314