
Data Sheet | Item Number: 267-328

Snap-on type conductor support; without ground contact; 4-pole; white/gray

https://www.wago.com/267-328



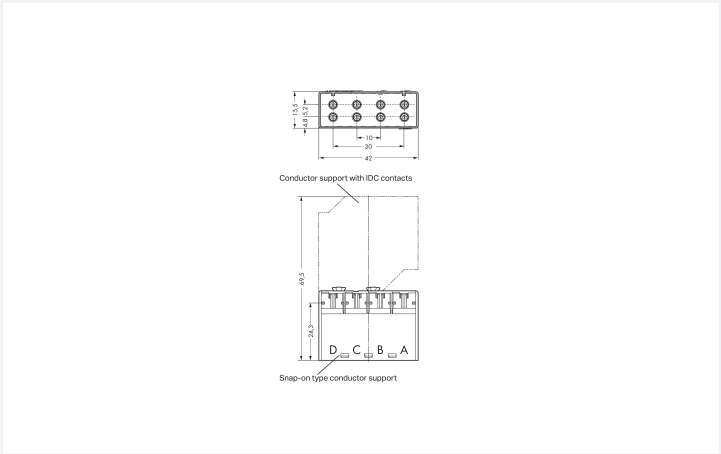

Color: white/gray

Dimensions in mm

Conductor support, 267 Series, PUSH WIRE®

Enjoy easy electrical installations with conductor support (item number 267-328). Conductors can only be connected to conductor support if their strip length is between 11 and 12 mm . This product features one conductor terminal and utilizes PUSH WIRE®. Our reliable PUSH WIRE® connection offers the fastest method for clamping conductors. It utilizes the conductor's stiffness to overcome the clamping spring's contact force. The item's dimensions are (42 x 15.5 x 29.5) mm (width x height x depth). Conductor support is suitable for conductor cross-sections ranging from 1.5 mm² to 2.5 mm².

Tin is used for coating the contact surfaces.

- The right solution for every wiring task
- Safe and fast installation
- 4 connection points

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated impulse withstand voltage	-	4 kV	-
Rated current	-	16 A	-

Connection Data

Clamping units	8
Total number of potentials	4
Number of connection types	1
Number of levels	1

Connection 1

Connection technology	PUSH WIRE®
Solid conductor	1.5 … 2.5 mm²
Strip length	11 … 12 mm / 0.43 … 0.47 inches
Pole number	4

Physical data

Width	42 mm / 1.654 inches
Height	15.5 mm / 0.61 inches
Depth	29.5 mm / 1.161 inches

Material data

Note (material data)	Information on material specifications can be found here
Color	white/gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E_{Cu})
Contact Plating	Tin
Fire load	0.279 MJ
Weight	15.4 g

Environmental requirements

Processing temperature	-35 … +85 °C
Continuous operating temperature	-60 … +105 °C
Temperature stability	105 °C

Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
PU (SPU)	500 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4045454572211
Customs tariff number	39269097900

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Continued on next page

Approvals / Certificates

General approvals

Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc.	UL 1977	UL-US-L45171-12-52204002
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 267-328

Documentation

Additional Information

Technical Section	03.04.2019	pdf 2027.26 KB

CAD/CAE-Data

CAD data

2D/3D Models 267-328

CAE data

ZUKEN Portal 267-328