

Data Sheet | Item Number: 267-422

Conductor support, base; with direct ground contact; with snap-in mounting feet; 7-pole; white

https://www.wago.com/267-422

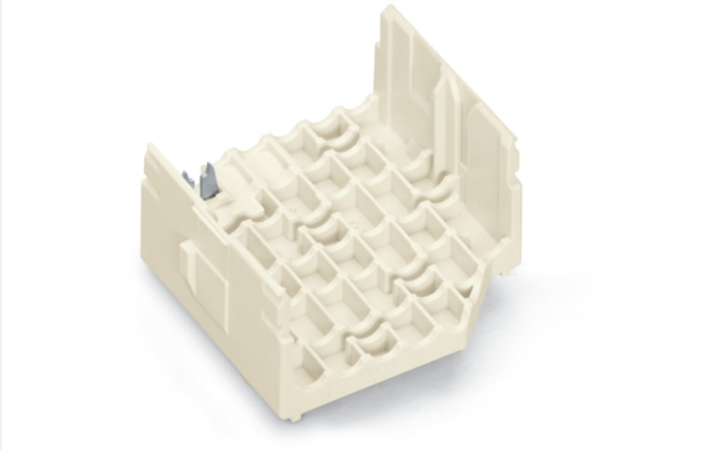

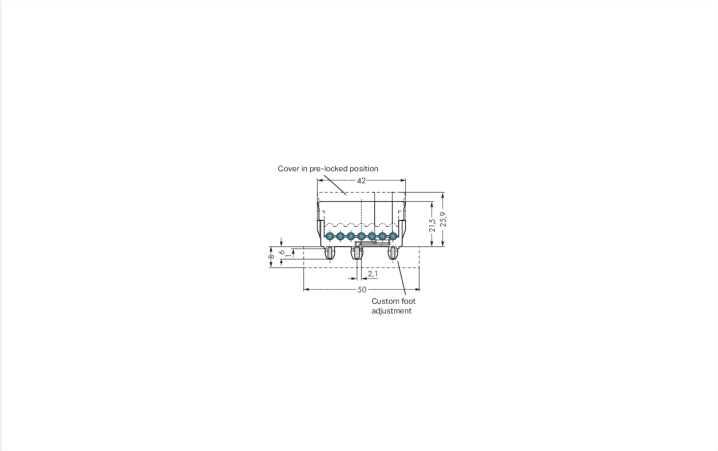

Color: white

Dimensions in mm

Conductor support, 267 Series, IDC connection

Enjoy seamless electrical installations with conductor support (item number 267-422). Strip lengths must be 8 mm when connecting conductors to conductor support. This product incorporates one conductor terminal and utilizes an IDC connection. An Insulation Displacement Connection (IDC) is the perfect choice for supplying underfloor tanks, for example, using flat cables from 1.5 mm² to 16 mm² and the corresponding connection components. Conductor support is suitable for conductor cross-sections ranging from 1.5 mm² to 2.5 mm².

Tin is used for coating the contact surfaces.

- Permanently secure connections
- Compact sizes

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated impulse withstand voltage	-	4 kV	-
Rated current	-	6 A	-

Connection Data

Number of connection types	1
Number of levels	1

Connection 1

Connection technology	IDC connection
Solid conductor	1.5 … 2.5 mm²
Strip length	8 mm / 0.31 inches

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V2
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E_{Cu})
Contact Plating	Tin
Fire load	0.128 MJ
Weight	5.5 g

Environmental requirements

Temperature stability	105 °C

Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
PU (SPU)	250 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4055143369510
Customs tariff number	39269097900

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals

Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	NL-47718
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-100641
UL Underwriters Laboratories Inc.	UL 1977	UL-US-L45171-12-52204002
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309

Continued on next page

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 267-422

Documentation

Additional Information

Technical Section	03.04.2019	pdf 2027.26 KB

CAD/CAE-Data

CAD data

2D/3D Models 267-422