Data Sheet | Item Number: 2759-205/261-1000

Application Lighting Management; S; Single License; Online activation

https://www.wago.com/2759-205/261-1000

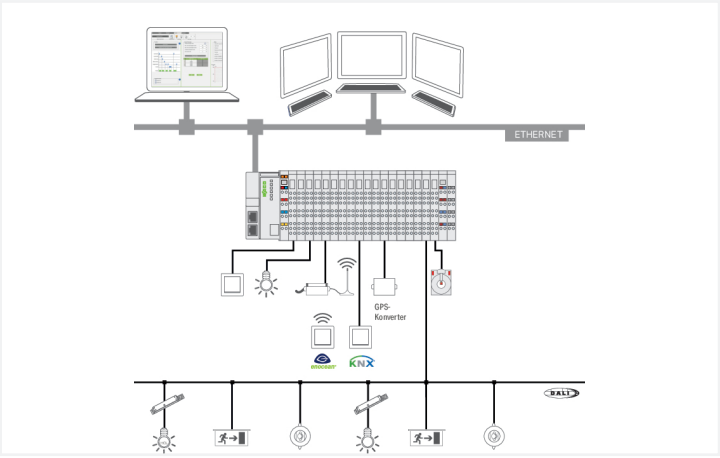

WAGO Lighting Management is a highly sophisticated solution for lighting control in large spaces, such as production facilities and warehouses. By combining predefined hardware and user-friendly software, WAGO offers a lighting management system that makes planning and commissioning new lighting systems easier while providing numerous advantages for operation. The basic idea: WAGO Lighting Management is designed around the need to meet the vastly different light requirements of both warehouses and production facilities. For example, a production facility can be divided into virtual rooms in which light can be adapted flexibly. Each virtual room receives signals from sensors and actuators to set the appropriate light intensity automatically. Virtual rooms allow quick, easy implementation of both conversions and room changes, as well as easy operation via Web configuration.

Software data

Supported devices	750-8212: PFC200; G2; 2ETH RS Web Panel 400

Delivery

License type	License for a maximum of 2 DALI lines, includes Lighting Management S visualization
Delivery type	License certificate by email (software available for download)
License generation	DRM

Data Act

Pre-contractual Information	Data-Act-SOL-Application-Lighting-Management

Commercial data

PU (SPU)	1 pcs
Packaging type	not specified
GTIN	4066966369038
Customs tariff number	88888888888

Product Classification

ETIM 10.0	EC002537
UNSPSC	43233603
ETIM 9.0	EC002537
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2759-205/261-1000

Documentation

Compatibility Information

Compatibility List DALI Sensors	V 1.2.4 19.02.2025	pdf 516.91 KB	

Bid Text

2759-205/261-1000	docx 40.01 KB	
2759-205/261-1000	xml 15.13 KB	

1 Compatible Products

1.1 Optional Accessories

1.1.1 Application

1.1.1.1 Analog input



Item No.: 750-495/000-002
3-Phase Power Measurement; 690 VAC Rogowski coils



Item No.: 750-495
3-Phase Power Measurement; 690 VAC, 1 A



Item No.: 750-495/000-001
3-Phase Power Measurement; 690 VAC, 5 A

1.1.1.2 Bus end module



Item No.: 750-600
End Module

Continued on next page

1.1.1.3 DALI interface



Item No.: 753-647
DALI Multi-Master

1.1.1.4 Digital input



Item No.: 750-1405
16-channel digital input; 24 VDC; 3 ms

1.1.1.5 Digital output



Item No.: 750-1504
16-channel digital output; 24 VDC; 0.5 A

1.1.1.6 KNX interface



Item No.: 753-646
KNX/EIB/TP1 Interface

1.1.1.7 Power Measurement



Item No.: 750-495/000-002
3-Phase Power Measurement; 690 VAC Rogowski coils



Item No.: 750-495
3-Phase Power Measurement; 690 VAC, 1 A



Item No.: 750-495/000-001
3-Phase Power Measurement; 690 VAC, 5 A

1.1.1.8 RTC module



Item No.: 750-640
Real-time clock Module

1.1.1.9 Serial interface



Item No.: 750-652
RS-232/485 Serial Interface

1.1.1.10 Serial Interface RS-232/485



Item No.: 750-652
RS-232/485 Serial Interface

Continued on next page

1.1.2 Communication

1.1.2.1 EnOcean



Item No.: 2852-7102
SRE Repeater with ext. ant. / EasySens Radio Repeater



Item No.: 2852-7101
STC65 RS-485 EVC EnOcean Receiver/ Transmitter with RS-485 EVC interface

1.1.2.2 General accessories



Item No.: 2852-7901
GPS DCF Converter UTC±

1.1.3 Current transformer

1.1.3.1 Current transformer terminal block



Item No.: 2007-8874
Compact terminal block; for current and voltage transformers; 6,00 mm²; multicoloured



Item No.: 2007-8877
Compact terminal block; for current transformer circuit; 6,00 mm²; multicoloured

1.1.4 Power supply

1.1.4.1 Power Supply



Item No.: 787-1012
Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 2.5 A output current



Item No.: 787-1007
Switched-mode power supply; for DALI module (753-647); 1-phase; 18 VDC output voltage; 1.1 A output current; 2,50 mm²

1.1.5 Radio transmitter

1.1.5.1 EnOcean



Item No.: 758-940/001-000
Radio transmitter; EnOcean easyfit PTM 250; 2-channel lighting control



Item No.: 758-940/003-000
Radio transmitter; EnOcean easyfit PTM 250; 4-channel lighting control

Continued on next page

1.1.6 Relay module

1.1.6.1 Relay module



Item No.: 788-357
Relay module; Nominal input voltage: 24 VDC; 1 make contact; Limiting continuous current: 16 A; Red status indicator; Module width: 15 mm

1.1.7 Sensors

1.1.7.1 Sensor

Item No.: 2852-7208
4p4c connection cable, 50 cm



Item No.: 2852-7215
Adaptor; Surface mounting set (IP54)



Item No.: 2852-7207
DALI HIGHBAY ADAPTER / Control units for light management systems

Item No.: 2852-7203
DALI LS/PD LI / Control units for light management systems



Item No.: 2851-8202
DALI sensor coupler



Item No.: 2852-7204
DALI Sensor Coupler E / DALI sensor coupler for external sensors



Item No.: 2852-7205
DALI Sensor Coupler HF LS LI / DALI coupler for radar sensor HF LS LI



Item No.: 2852-7301
DALI XC Control Module with 4 freely programmable inputs

Item No.: 2852-7230
DALI-Sensor; IR Quattro HD DALI 2

Item No.: 2852-7231
DALI-Sensor; IR Quattro SLIM XS DALI 2

Item No.: 2852-7232
DALI-Sensor; IS3360 MX Highbay DALI 2

Item No.: 2852-7233
DALI-Sensor; IS345 MX Highbay DALI 2



Item No.: 2852-7220
DALI-Sensor; MSensor G3 SRC 30 PIR 5DPI WH



Item No.: 2852-7221
DALI-Sensor; MSensor G3 SSM 30 10DPI WH



Item No.: 2852-7210
DALI-Sensor; PD11-BMS-FLAT



Item No.: 2852-7213
DALI-Sensor; PD4-BMS-GH



Item No.: 2852-7214
DALI-Sensor; PD4N-BMS



Item No.: 2852-7206
HF LS LI / Control units for light management systems

Item No.: 2852-7201
HIGH BAY / Stand-alone motion sensors with switching contact



Item No.: 2852-7202
VISION / Stand-alone motion sensors with switching contact



Item No.: 2851-8201
WAGO DALI Multi-Sensor Kit