
Data Sheet | Item Number: 2773-500

Mounting carrier; for single- and double-row con.; 2773 Series; for DIN-35 rail mounting/ screw mounting; orange

https://www.wago.com/2773-500



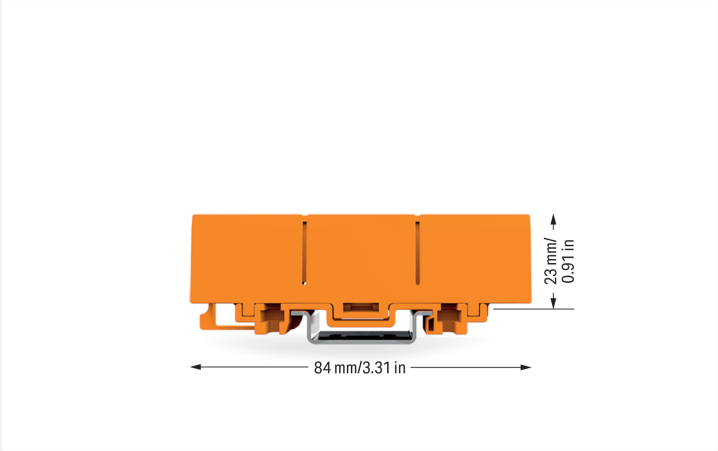

Color: orange

Notes

Note	One single carrier can hold up to 30 clamping units in a very narrow space. Previously, this was only possible using rail-mount terminal blocks. Additional benefits: ▪ Mount carrier onto DIN-35 rail or via screws – easily and quickly ▪ Accommodate three 4 mm² (12 AWG) 2773 Series Connectors in a single carrier ▪ Easily exchange connectors ▪ Large marking area for self-adhesive marking strips or for direct marking with permanent felt-tip pen

Physical data

Width	18 mm / 0.709 inches
Height	84 mm / 3.307 inches
Depth from upper-edge of DIN-rail	23 mm / 0.906 inches
Depth	28.9 mm / 1.138 inches

Mechanical data

Mounting type	DIN-35 rail Screw mount
Suitable	for single- and double-row connectors (2773 Series)

Material data

Note (material data)	Information on material specifications can be found here
Color	orange
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.35 MJ
Weight	12.6 g

Commercial data

PU (SPU)	50 (10) pcs
Packaging type	Box
Country of origin	CN
GTIN	4055143837439
Customs tariff number	39269097900

Product Classification

UNSPSC	39121410
ETIM 9.0	EC002848
ETIM 10.0	EC002848
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2773-500

CAD/CAE-Data

CAD data

2D/3D Models 2773-500

Continued on next page

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking


1.1.1.1 Marking strip



Item No.: 210-834
Marking strips; on reel; 5 mm wide; plain; Self-adhesive; white


Installation Notes







To adjust the mounting carrier, unlock the latch via operating tool (5.5 mm blade) and move the clamping slide to the required width by rotating the tool.



The mounting carrier is suitable for both connector widths.