

Data Sheet | Item Number: 289-114

Component module with resistor; with 8 pcs; Resistor 2K7; 0.6 Watt; 2,50 mm²

https://www.wago.com/289-114

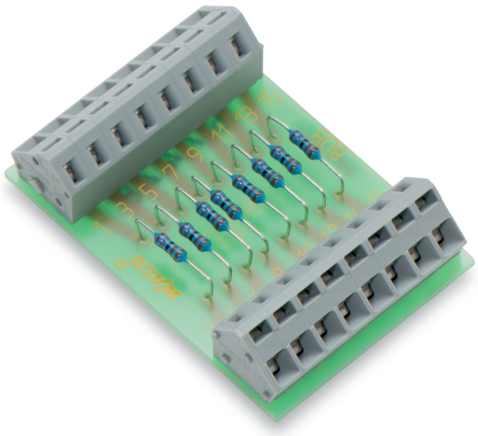



Notes

Safety Information	**Notice!** Accessible live parts! Protection against accidental contact must be provided by the system installer, e.g., using a WAGO 709 Series Cover (see "Accessories") or a similar cover. The installation guidelines must be followed for each specific application.
Note	Max. admissible capacity of a single resistor – with all resistors loaded, the max. admissible power dissipation must be reduced. Other resistors are available upon request!

Electrical data

Operating voltage	≤ 40 VAC/VDC
Resistor	2K7
Tolerance	±1 %
Resistor type/design	DIN 0207
Temperature coefficient	50 ppm (20 °C)
Component rated dissipation (P70)	0.6 W

Safety and protection

Protection type	IP00

Connection Data

Note (conductor cross-section)	12 AWG: THHN, THWN

Connection 1

Connection technology	CAGE CLAMP®
WAGO connector	WAGO 236 Series
Solid conductor	0.08 … 2.5 mm² / 28 … 12 AWG
Fine-stranded conductor	0.08 … 2.5 mm² / 28 … 12 AWG
Strip length	5 … 6 mm / 0.2 … 0.24 inches

Continued on next page

Physical data

Width	42.5 mm / 1.673 inches
Height from the surface	32 mm / 1.26 inches
Depth	62.5 mm / 2.461 inches

Mechanical data

Mounting type	Mounting on DIN-rail via DIN-rail adapter
Housing design	PCB

Material data

Fire load	0.802 MJ
Weight	23.4 g

Environmental requirements

Ambient temperature (operation)	-25 … +40 °C

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	50 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454192938
Customs tariff number	85369010000

Product Classification

UNSPSC	32121705
eCl@ss 10.0	27-39-03-13
eCl@ss 9.0	27-39-03-13
ETIM 9.0	EC000903
ETIM 10.0	EC000903
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 289-114

Continued on next page

Documentation

Bid Text

289-114	11.02.2015	doc 25.00 KB
289-114	19.02.2019	xml 3.48 KB

Instruction Leaflet

Operation and Assembly Instructions Interface	V 1.0.0 02.04.2025	pdf 1246.19 KB

CAD/CAE-Data

CAD data

2D/3D Models 289-114

CAE data

EPLAN Data Portal 289-114

WSCAD Universe 289-114

ZUKEN Portal 289-114

1 Compatible Products

1.1 Optional Accessories

1.1.1 Ferrule

1.1.1.1 Ferrule

Item No.: 216-321
Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow

Item No.: 216-322
Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise

Item No.: 216-221
Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white

Item No.: 216-222
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray

Item No.: 216-223
Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red



Item No.: 216-224
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black

1.1.2 Installation

1.1.2.1 Mounting carrier and mounting feet



Item No.: 288-001
Mounting carrier; gray



Item No.: 288-002
Universal mounting foot; snap-fit type; suitable for DIN 15, 35 and 32 rails; gray

Continued on next page

1.1.3 Marking

1.1.3.1 Marking strip



Item No.: 210-831
Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white



Item No.: 210-832
Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white

1.1.4 Tool

1.1.4.1 Operating tool



Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured