
Data Sheet | Item Number: 289-128/002-000

Component module with resistor; with 1 pcs; Resistor 4K7; 5 Watt; in mounting carrier


https://www.wago.com/289-128/002-000



Similar to illustration
Picture shows 289-128/003-000

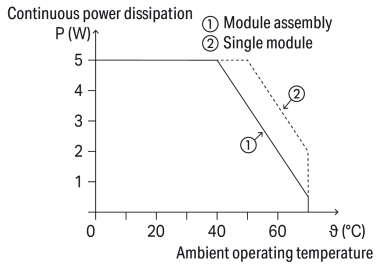

Current-carrying capacity curve



Notes

Safety Information	Depending on operating conditions, the components' temperature may exceed the limit temperature for accessible parts.
Safety information 2	**Notice!** Accessible live parts! Protection against accidental contact must be provided by the system installer, e.g., using a WAGO 709 Series Cover (see "Accessories") or a similar cover. The installation guidelines must be followed for each specific application.
Note	Other resistors are available upon request!

Electrical data

Resistor	4K7
Tolerance	±10 %
Temperature coefficient	50 ppm (20 °C)
Component rated dissipation (P70)	5 W

Safety and protection

Protection type	IP00

Connection Data

Note (conductor cross-section)	12 AWG: THHN, THWN

Connection 1

Connection technology	CAGE CLAMP®
WAGO connector	WAGO 236 Series
Solid conductor	0.08 … 2.5 mm² / 28 … 12 AWG
Fine-stranded conductor	0.08 … 2.5 mm² / 28 … 12 AWG
Strip length	5 … 6 mm / 0.2 … 0.24 inches

Physical data

Width	13 mm / 0.512 inches
Height	85 mm / 3.346 inches
Depth from upper-edge of DIN-rail	34 mm / 1.339 inches

Mechanical data

Mounting type	DIN-35 rail
Housing design	Mounting carrier

Material data

Fire load	0.276 MJ
Weight	18.9 g

Environmental requirements

Ambient temperature (operation)	-20 … +70 °C (derating must be observed)
Ambient temperature (storage)	-40 … +70 °C

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	18 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143324618
Customs tariff number	85369010000

Product Classification

UNSPSC	32121705
eCl@ss 10.0	27-14-11-27
eCl@ss 9.0	27-14-11-49
ETIM 9.0	EC000903
ETIM 10.0	EC000903
ECCN	NO US CLASSIFICATION

Continued on next page

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 289-128/002-000

Documentation

Bid Text

289-128/002-000	19.02.2019	xml 3.40 KB
289-128/002-000	11.02.2015	doc 25.00 KB

Instruction Leaflet

Operation and Assembly Instructions Interface	V 1.0.0 02.04.2025	pdf 1246.19 KB

CAD/CAE-Data

CAD data

2D/3D Models 289-128/002-000

CAE data

EPLAN Data Portal 289-128/002-000

WSCAD Universe 289-128/002-000

ZUKEN Portal 289-128/002-000

1 Compatible Products

1.1 Optional Accessories

1.1.1 Ferrule

1.1.1.1 Ferrule



Item No.: 216-321
Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow

Item No.: 216-322
Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise

Item No.: 216-221
Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white

Item No.: 216-222
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray

Item No.: 216-223
Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red



Item No.: 216-224
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black

Continued on next page

1.1.2 Installation

1.1.2.1 Cover



Item No.: 709-153
Cover; Type 1; suitable for cover carrier, type 1; 1 m long; transparent

1.1.2.2 Cover carrier



Item No.: 709-167
Cover carrier; Type 1; incl. fixing/retaining screws and knurled nut; suitable for 279 to 282 and 880 Series rail-mounted terminal blocks; suitable for 264 Series miniature rail-mounted terminal blocks; suitable for 270 Series sensor and actuator terminal blocks; gray

1.1.3 Marking

1.1.3.1 Marking strip



Item No.: 709-196
Marking strips; for laser printer; translucent



Item No.: 210-831
Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white



Item No.: 210-832
Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white

Item No.: 709-177
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



Item No.: 709-178
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

1.1.4 Tool

1.1.4.1 Operating tool



Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured