

# Data Sheet | Item Number: 294-4435

Lighting connector; push-button, external; with screw-type ground contact; 5-pole; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); white

https://www.wago.com/294-4435

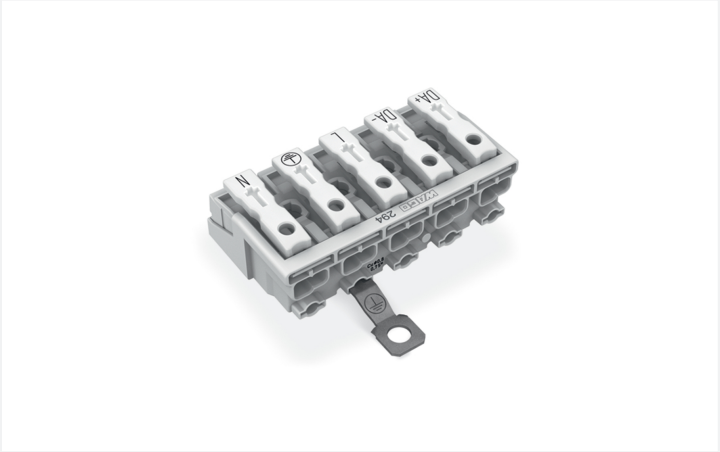

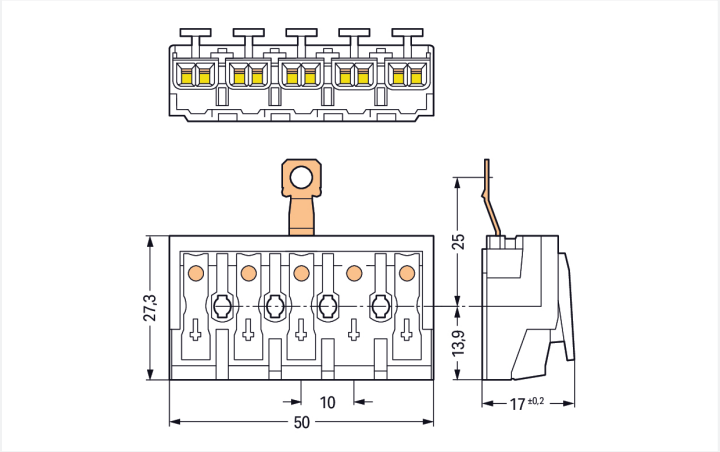


Color: white

Dimensions in mm

Field-wiring terminal block, 294 Series, with 10 mm pin spacing

Our field-wiring terminal block (item number 294-4435) ensures effortless electrical installations. Conductors can only be connected to this field-wiring terminal block if their strip length is between 8 and 9 mm . This product incorporates four conductor terminals and utilizes Push-in CAGE CLAMP® and PUSH WIRE®. Our Push-in CAGE CLAMP® is a universal, maintenance-free connection solution for all conductor types, boasting a key feature: both solid and fine-stranded conductors with ferrules can be directly inserted without the need for tools or any preparation, such as crimping the ferrule. Our reliable PUSH WIRE® connection offers the fastest method for clamping conductors. It utilizes the conductor's stiffness to overcome the clamping spring's contact force. The dimensions are (50 x 17 x 27.3) mm (width x height x depth). This field-wiring terminal block is suitable for conductor cross sections ranging from 0.5 mm² to 2.5 mm² on one side and for conductor cross sections ranging from 0.5 mm² to 2.5 mm² on the other side as well as conductor cross sections from 0.5 mm² to 2.5 mm² and from 0.5 mm² to 0.75 mm² depending on the conductor type.

The contact surface is coated with tin.

## Electrical data

| Ratings per | IEC/EN 60998-1 | | |
|---|---|---|---|
| Overvoltage category | III | III | II |
| Pollution degree | 3 | 2 | 2 |
| Nominal voltage | - | - | 500 V |
| Rated impulse withstand voltage | - | - | 4 kV |
| Rated current | - | - | 24 A |

| Ratings per IEC/EN – Notes | |
|---|---|
| Ratings (note) | Connection points |

| Ratings per | IEC/EN 60998-2-2 | | |
|---|---|---|---|
| Overvoltage category | III | III | II |
| Pollution degree | 3 | 2 | 2 |
| Nominal voltage | - | - | 500 V |
| Rated impulse withstand voltage | - | - | 4 kV |
| Rated current | - | - | 24 A |

| General information | |
|---|---|
| Wiring direction | Side-entry wiring |

## Connection Data

| | |
|---|---|
| Clamping units | 25 |
| Total number of potentials | 5 |
| Number of connection types | 4 |
| PE function | Screw-type PE contact |

### Connection 1

| | |
|---|---|
| Connection type | External 1 |
| Connection technology | Push-in CAGE CLAMP® |
| Number of connection points | 2 |
| Actuation type | Push-button |
| Connectable conductor materials | Copper |
| Solid conductor | 0.5 … 2.5 mm² / 18 … 12 AWG |
| Solid conductor; push-in termination | 0.5 … 2.5 mm² / 18 … 12 AWG |
| Stranded conductor | 0.5 … 2.5 mm² / 18 … 14 AWG |
| Fine-stranded conductor | 0.5 … 2.5 mm² / 18 … 14 AWG |
| Fine-stranded conductor; with insulated ferrule | 0.5 … 1.5 mm² / 18 … 16 AWG |
| Fine-stranded conductor; with uninsulated ferrule | 0.5 … 1.5 mm² / 18 … 16 AWG |
| Fine-stranded conductor; with ferrule; push-in termination | 0.5 mm² / 18 AWG |
| Strip length | 8 … 9 mm / 0.31 … 0.35 inches |
| Pole number | 5 |
| Wiring direction | Side-entry wiring |

### Connection 2

| | |
|---|---|
| Connection type | Internal 2 |
| Connection technology | PUSH WIRE® |
| Number of connection points | 1 |
| Actuation type | Push-in |
| Solid conductor | 0.5 … 2.5 mm² / 18 … 14 AWG |
| Fine-stranded conductor; with insulated ferrule | 0.5 … 1 mm² / 18 … 16 AWG |
| Fine-stranded conductor; with uninsulated ferrule | 0.5 … 1.5 mm² / 18 … 14 AWG |
| Strip length | 8 … 9 mm / 0.31 … 0.35 inches |

### Connection 3

| | |
|---|---|
| Connection type | Internal 3 |
| Connection technology | PUSH WIRE® |
| Number of connection points | 1 |
| Actuation type | Push-in |
| Solid conductor | 0.5 … 1.5 mm² / 18 … 16 AWG |
| Fine-stranded conductor; with insulated ferrule | 0.5 … 0.75 mm² / 18 AWG |
| Fine-stranded conductor; with uninsulated ferrule | 0.5 … 1 mm² / 18 AWG |
| Strip length | 8 … 9 mm / 0.31 … 0.35 inches |

### Connection 4

| | |
|---|---|
| Connection type | Internal 4 |
| Connection technology | PUSH WIRE® |
| Number of connection points | 1 |
| Actuation type | Push-in |
| Solid conductor | 0.5 … 0.75 mm² / 18 AWG |
| Strip length | 8 … 9 mm / 0.31 … 0.35 inches |

## Physical data

| | |
|---|---|
| Pin spacing | 10 mm / 0.394 inches |
| Width | 50 mm / 1.969 inches |
| Height | 17 mm / 0.669 inches |
| Depth | 27.3 mm / 1.075 inches |


Continued on next page

## Mechanical data

| | |
|---|---|
| Marking | DA+ DA- L ⏚ N |
| Mounting type | without snap-in mounting feet |

## Material data

| | |
|---|---|
| Note (material data) | Information on material specifications can be found here |
| Color | white |
| Material group | IIIa |
| Insulation material (main housing) | Polycarbonate (PC) |
| Flammability class per UL94 | V0 |
| Clamping spring material | Chrome-nickel spring steel (CrNi) |
| Contact material | Electrolytic copper ($E_{Cu}$) |
| Contact Plating | Tin |
| Fire load | 0.229 MJ |
| Halogen-free | Yes |
| Weight | 15.8 g |

## Environmental requirements

| | |
|---|---|
| Temperature stability | 120 °C |
| T marking | T85 |

## Commercial data

| | |
|---|---|
| Product Group | 8 (Misc. Chassis Mount Blocks) |
| PU (SPU) | 250 pcs |
| Packaging type | Bag |
| Country of origin | PL |
| GTIN | 4050821098102 |
| Customs tariff number | 85369010000 |

## Product Classification

| | |
|---|---|
| UNSPSC | 39121409 |
| eCl@ss 10.0 | 27-14-11-06 |
| eCl@ss 9.0 | 27-14-11-06 |
| ETIM 9.0 | EC001284 |
| ETIM 10.0 | EC001284 |
| ECCN | NO US CLASSIFICATION |

## Environmental Product Compliance

| | |
|---|---|
| RoHS Compliance Status | Compliant,No Exemption |
| SCIP notification number (Austria) | 242de0e4-3b10-4507-a0bb-57a37a08ea41 |
| SCIP notification number (Belgium) | 39a97880-98bf-462f-865f-09857cab6f1a |
| SCIP notification number (Bulgaria) | f03054ac-09b3-4645-8b4c-db57c673c5c2 |
| SCIP notification number (Czech Republic) | ba3d4047-4111-4567-823a-a47f22504399 |
| SCIP notification number (Denmark) | 50ceef8e-755a-4b06-8252-9143d222cf69 |
| SCIP notification number (Finland) | 096e0453-05d4-4a87-84c7-b4ab86d7ffb6 |
| SCIP notification number (France) | 25636ff2-a14e-435f-a93b-ff888e4aeb2a |
| SCIP notification number (Germany) | f0e07e56-a9f8-4889-a495-9df5db53e91f |
| SCIP notification number (Hungary) | 6ae4ff6e-61f3-4589-9c0a-b9352dbd3554 |
| SCIP notification number (Italy) | 95f5c598-efef-4f82-a1df-94e9b8fb5b9e |
| SCIP notification number (Netherlands) | 292e66a8-34be-4df6-a37b-d5584a112301 |
| SCIP notification number (Poland) | edb0e6e3-f773-44c8-b118-bf1a5207e5d7 |
| SCIP notification number (Romania) | ff42233f-3769-45a1-b0ef-d3442605de7d |


Continued on next page

## Environmental Product Compliance

| | |
|---|---|
| SCIP notification number (Sweden) | 36f250ee-73e7-4066-b0b1-db93609087c2 |

## Approvals / Certificates

### General approvals

| Approval | Standard | Certificate Name |
|---|---|---|
| ENEC 05<br>DEKRA Certification B.V. | EN 60998 | 2128791.01 |

### Declarations of conformity and manufacturer's declarations

| Approval | Standard | Certificate Name |
|---|---|---|
| EU-Declaration of Conformity<br>WAGO GmbH & Co. KG | - | - |
| UK-Declaration of Conformity<br>WAGO GmbH & Co. KG | - | - |

## Downloads

### Environmental Product Compliance

**Compliance Search**

Environmental Product Compliance 294-4435

### Documentation

**Bid Text**

| | | | |
|---|---|---|---|
| 294-4435 | 19.02.2019 | xml<br>5.59 KB | |
| 294-4435 | 13.06.2017 | doc<br>28.50 KB | |

## CAD/CAE-Data

**CAD data**

2D/3D Models 294-4435

**CAE data**

WSCAD Universe 294-4435

ZUKEN Portal 294-4435


Continued on next page

# 1 Compatible Products

## 1.1 Optional Accessories

### 1.1.1 Strain relief

#### 1.1.1.1 Strain relief



Item No.: 294-370
Strain relief; for 294 Series; with snap-in mounting feet; white



Item No.: 294-375
Strain relief; for 294 Series; without snap-in mounting feet; white

#### 1.1.1.2 Strain relief plate



Item No.: 294-364
Strain relief plate; for 294 Series; for multi-core cables; 3- to 5-pole; with secured clamp; white



Item No.: 294-384
Strain relief plate; for 294 Series; for single strands; 3- to 5-pole; with secured clamp; white

### 1.1.2 Tool


#### 1.1.2.2 Operating tool




Item No.: 206-294
Disconnection tool; green

# Installation Notes


## Installation




5-pole – with screw-type ground contact, d ≤ 4.1 mm





Mounting hole for screw
**Notice:** The maximum thread diameter for self-tapping screws is 3 mm.




Hole for screw mount
**Notice:** The maximum thread diameter for self-tapping screws is 3 mm.

## Conductor termination





| EUROPE |
|---|
| 1 x 0.5 … 2.5 mm² "s" |
| 1 x 0.5 … 1.5 mm² "s" |
| 1 x 0.5 … 0.75 mm² "s" |
| AMERICA |
| 1 x AWG 18 … 14 "s" |
| 1 x AWG 18 … 16 "s" |
| 1 x AWG 18 "s" |
| JAPAN |
| 1 x 0.8 … 1.6 mm diam. "s" |
| 1 x 0.8 … 1 mm diam. "s" |
| 1 x 0.8 mm diam. "s" |

**Internal connection:**
PUSH WIRE® for internal wiring with solid conductors

| EUROPE |
|---|
| 2 x 0.5 … 2.5 mm² "s, str, f-str" |
| AMERICA |
| 2 x AWG 18 … 12 "s" |
| 2 x AWG 18 … 14 "s, f-str" |
| JAPAN |
| 2 x 0.8 … 2 mm diam. "s" |
| 2 x 0.5 … 2 mm² "str, f-str" |


**External connection:**
Push-in CAGE CLAMP® for field-wiring with all conductor types






Continued on next page

## Conductor termination






Terminating five conductors per pole – solid and fine-stranded.

