

Data Sheet | Item Number: 294-8425

Lighting connector; push-button, external; for Linect®; with screw-type ground contact; L´-N´-L-PE-N; 5-pole; Cod. L; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); white

https://www.wago.com/294-8425

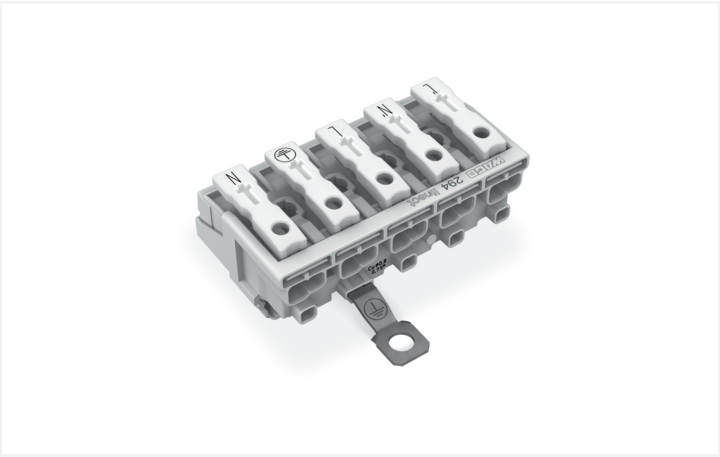

Color: white

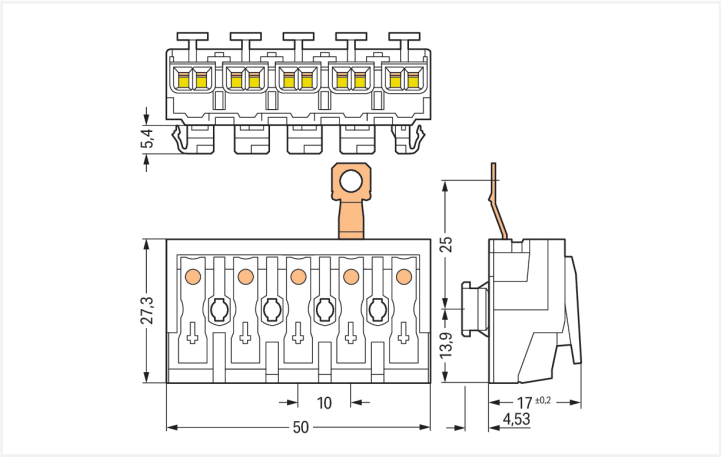

Dimensions in mm

Field-wiring terminal block with linect®, 294 Series, white

Field-wiring terminal block with linect® (item number 294-8425) provides seamless electrical installations. Strip lengths must be between 8 and 9 mm when connecting conductors to field-wiring terminal block with linect®. Featuring four conductor terminals along with Push-in CAGE CLAMP® as well as PUSH WIRE®, this product is highly versatile. Our Push-in CAGE CLAMP® is a universal, maintenance-free connection solution for all conductor types, offering a key advantage: It allows direct insertion of both solid and fine-stranded conductors with ferrules without needing tools. No preparation is required; for example, crimping the conductor's ferrule is not necessary. Our PUSH WIRE® connection uses the stiffness of the conductor to overcome the clamping spring's contact force, allowing faster and easier conductor clamping. The dimensions are (50 x 22.4 x 27.3) mm (width x height x depth). Depending on the type of conductor, field-wiring terminal block with linect® is suitable for conductor cross sections ranging from 0.5 mm² to 2.5 mm² on one side and for conductor cross sections from 0.5 mm² to 2.5 mm² on the other side as well as conductor cross sections from 0.5 mm² to 1.5 mm² and from 0.5 mm² to 0.75 mm².

Tin is used for coating the contact surfaces.

Electrical data

Ratings	Connection points		
Ratings per	IEC/EN 60998-1	IEC/EN 60998-1	IEC/EN 60998-1
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	500 V
Rated impulse withstand voltage	-	-	4 kV
Rated current	-	-	24 A

Ratings	Connection points		
Ratings per	IEC/EN 60998-2-2	IEC/EN 60998-2-2	IEC/EN 60998-2-2
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	500 V
Rated impulse withstand voltage	-	-	4 kV
Rated current	-	-	24 A

Ratings	Linect® plug-in connection		
Ratings per	IEC/EN 61984	IEC/EN 61984	IEC/EN 61984
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	500 V
Rated impulse withstand voltage	-	-	4 kV
Rated current	-	-	16 A

Connection Data

Total number of potentials	5
Number of connection types	4
PE function	Screw-type PE contact

Connection 1

Connection type	External 1
Connection technology	Push-in CAGE CLAMP®
Number of connection points	2
Actuation type	Push-button
Solid conductor	0.5 … 2.5 mm² / 18 … 12 AWG
Solid conductor; push-in termination	0.5 … 2.5 mm² / 18 … 12 AWG
Stranded conductor	0.5 … 2.5 mm² / 18 … 14 AWG
Fine-stranded conductor	0.5 … 2.5 mm² / 18 … 14 AWG
Fine-stranded conductor; with insulated ferrule	0.5 … 1.5 mm² / 18 … 16 AWG
Fine-stranded conductor; with uninsulated ferrule	0.5 … 1.5 mm² / 18 … 16 AWG
Fine-stranded conductor; with ferrule; push-in termination	0.5 mm² / 18 AWG
Strip length	8 … 9 mm / 0.31 … 0.35 inches
Pole number	5

Connection 2

Connection type	Internal 2
Connection technology	PUSH WIRE®
Number of connection points	1
Actuation type	Push-in
Solid conductor	0.5 … 2.5 mm² / 18 … 14 AWG
Fine-stranded conductor; with insulated ferrule	0.5 … 1 mm² / 18 … 14 AWG
Fine-stranded conductor; with uninsulated ferrule	0.5 … 1.5 mm² / 18 … 16 AWG
Strip length	8 … 9 mm / 0.31 … 0.35 inches

Connection 3

Connection type	Internal 3
Connection technology	PUSH WIRE®
Number of connection points	1
Actuation type	Push-in
Solid conductor	0.5 … 1.5 mm² / 18 … 16 AWG
Fine-stranded conductor; with insulated ferrule	0.5 … 0.75 mm² / 18 AWG
Fine-stranded conductor; with uninsulated ferrule	0.5 … 1 mm² / 18 … 14 AWG
Strip length	8 … 9 mm / 0.31 … 0.35 inches

Connection 4

Connection type	Internal 4
Connection technology	PUSH WIRE®
Number of connection points	1
Actuation type	Push-in
Solid conductor	0.5 … 0.75 mm² / 18 AWG
Strip length	8 … 9 mm / 0.31 … 0.35 inches

Physical data

Pin spacing	10 mm / 0.394 inches
Width	50 mm / 1.969 inches
Height	22.4 mm / 0.882 inches
Height from the surface	17 mm / 0.669 inches
Depth	27.3 mm / 1.075 inches

Continued on next page

Mechanical data

Technology	Linect
Marking	L' N' L ⏚ N

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Material group	IIIa
Insulation material (main housing)	Polycarbonate (PC)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E_{Cu})
Contact Plating	Tin
Fire load	0.252 MJ
Weight	16.8 g

Environmental requirements

Temperature stability	120 °C
T marking	T85

Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
PU (SPU)	250 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4050821098942
Customs tariff number	85369010000

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 9.0	EC001284
ETIM 10.0	EC001284
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption
SCIP notification number (Austria)	b47e45b7-a2c7-40f7-a57a-da8c1607bb70
SCIP notification number (Belgium)	8945da53-1fc3-4235-83dc-c34ce500a482
SCIP notification number (Bulgaria)	f554ba5e-80b0-4499-8bb2-920e854fb377
SCIP notification number (Czech Republic)	33b555d9-740f-4b05-b040-bb218b2ad258
SCIP notification number (Denmark)	1d01d592-56a7-4cd3-949d-003450ee79f3
SCIP notification number (Finland)	f95268cd-f91b-436d-bd38-d48c986ac96d
SCIP notification number (France)	80b9dac8-8019-4c1a-a61f-cdcb73030ce1
SCIP notification number (Germany)	daefc003-4a6d-495e-8944-8419b12ab3e8
SCIP notification number (Hungary)	40913bad-182e-4664-9fff-90f093b39e9e
SCIP notification number (Italy)	41aae73e-fc14-4c99-9ee7-5a2b443cc0b3
SCIP notification number (Netherlands)	969ecc94-d8c6-4aef-b19f-1c7ff305da93
SCIP notification number (Poland)	0946e69c-5650-4922-bfe5-1bdf3c7f0d24
SCIP notification number (Romania)	71713ce3-57f8-4f79-bc80-0c9f6c62f8fe
SCIP notification number (Sweden)	31658b91-6605-4073-9d28-60b6b0c87d5d

Continued on next page

Approvals / Certificates

General approvals

Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61535	40029808

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 294-8425

Documentation

Additional Information

Technical Section	03.04.2019	pdf 2027.26 KB

CAD/CAE-Data

CAD data

2D/3D Models 294-8425

CAE data

WSCAD Universe 294-8425

ZUKEN Portal 294-8425