
Data Sheet | Item Number: 753-150

753 Series coding elements

https://www.wago.com/753-150

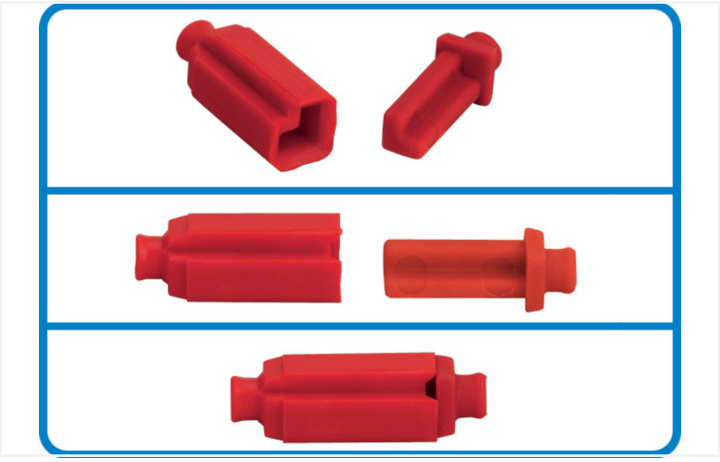

Color: red

Mechanical data	
Pluggable connector	pluggable

Material data	
Color	red
Fire load	0.003 MJ
Weight	0.1 g

Environmental requirements	
Ambient temperature (operation)	0 … +55 °C
Ambient temperature (storage)	-40 … +85 °C
Protection type	IP20
Pollution degree	2 per IEC 61131-2
Operating altitude	0 … 2000 m / 0 … 6562 ft
Relative humidity (without condensation)	95 %
Vibration resistance	4g per IEC 60068-2-6
Shock resistance	15g per IEC 60068-2-27
Exposure to pollutants	per IEC 60068-2-42 and IEC 60068-2-43
Permissible H_2S contaminant concentration at a relative humidity 75 %	10 ppm
Permissible SO_2 contaminant concentration at a relative humidity 75 %	25 ppm

Commercial data

Product Group	15 (I/O System)
PU (SPU)	100 pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918924856
Customs tariff number	39269097900

Product Classification

UNSPSC	39121708
eCl@ss 10.0	27-24-26-92
eCl@ss 9.0	27-24-26-92
ETIM 9.0	EC002584
ETIM 10.0	EC002584
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 753-150

Documentation

Bid Text

753-150	19.02.2019	xml 2.48 KB	
753-150	09.01.2019	docx 12.99 KB	

CAD/CAE-Data

CAE data

EPLAN Data Portal 753-150

WSCAD Universe 753-150