





- Pin A, L: 0.75 mm²
Pin C - J, N - T: 0.34 mm²
- | | | | |
|---|-----------------|---|-----------------|
| A | brown | N | pink-brown |
| C | white-pink | O | violet |
| E | black | P | white |
| G | pink | R | red |
| J | green | S | gray |
| L | blue | T | yellow |
| M | commoned with A | U | commoned with L |

Color: ■ black

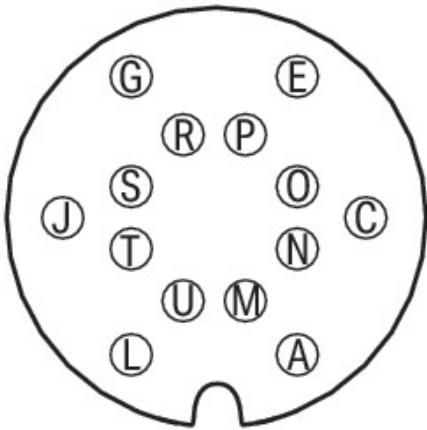

Dimensions in mm

Technical data	
Connection type	M16 socket - free end
Pole number	14
Cable connection direction to mating direction	90 °
Cable length	5 m
Operating voltage	150 V
Operating current	4 A
Operating current	6 mm ² 0,75 A
Rated impulse withstand voltage	1.2 kV



Mechanical data		
Bending cycles		2 million
Drag chain capability		Yes
Weight		610 g
Color		black

Environmental requirements		
Ambient (operating) temperature (dynamic)		-30 ... +90 °C
Ambient (operating) temperature (static)		-40 ... +90 °C
Protection type		IP67

Commercial data		
PU (SPU)		1 pcs
Packaging type		unpacked
Country of origin		DE
GTIN		4066966515350
Customs tariff number		85444290900
End of Sale		2027-01-01
End of Production		2027-01-02
End of Delivery		2027-03-01
End of Service and Repair		2027-07-01

Product Classification		
UNSPSC		26121629
eCl@ss 10.0		27-06-03-11
eCl@ss 9.0		27-06-03-11
ETIM 9.0		EC001855
ETIM 10.0		EC001855
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption

Approvals / Certificates

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-



Downloads

Environmental Product Compliance

Compliance Search		
Environmental Product Compliance	756-3206/140-050	

Documentation

System Description		
Sensor/Actuator Boxes – General Product Information	pdf 428.34 KB	

CAD/CAE-Data

CAE data		
WSCAD Universe	756-3206/140-050	