Data Sheet | Item Number: 756-9214/040-000

Fitted pluggable connector; 4-pole; M12 socket, right angle; Screw

https://www.wago.com/756-9214/040-000



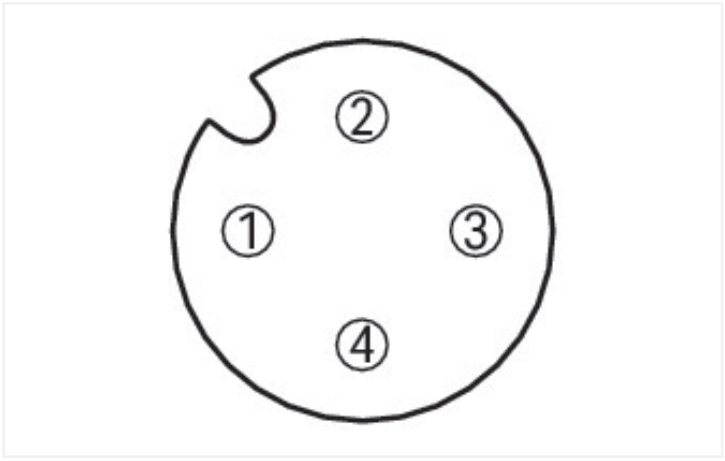

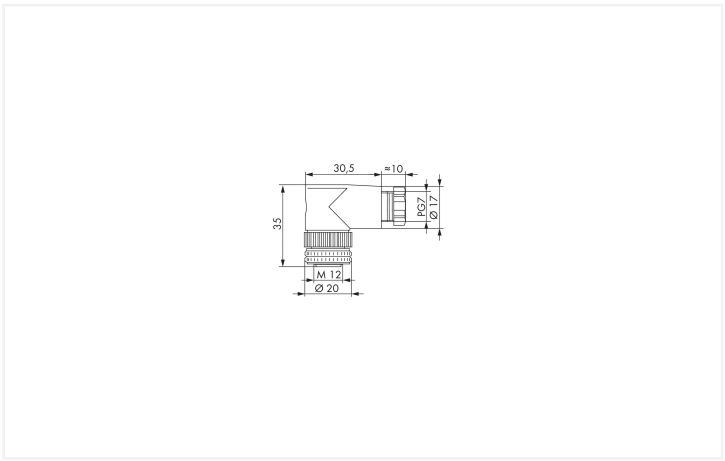

Dimensions in mm

Technical data

Connection type	M12 Socket
Pole number	4
Cable connection direction to mating direction	90 °
Connector interface coding (cable/adapter) 1 1	A-coded
Contact resistance	≤3 mΩ

Connection Data

Connection type	Screw clamp technology
Solid conductor	0.25 … 0.75 mm²

Mechanical data

Connectable sheathed cable diameter	4 … 6 mm
Housing material	Polybutylene terephthalate (PBT)
Contact material	CuZn
Contact Plating	Gold
Seal material	Sealing ring: neoprene
Mating cycles (max.)	50
Weight	24 g

Environmental requirements

Ambient temperature (operation)	-25 … +85 °C
Protection type	IP67
Note on protection type	in locked state
Pollution degree	3

Commercial data

PU (SPU)	5 (1) pcs
Packaging type	Box
Country of origin	HU
GTIN	4045454383602
Customs tariff number	85366990990

Product Classification

UNSPSC	39121413
eCl@ss 10.0	27-24-26-92
eCl@ss 9.0	27-24-26-92
ETIM 9.0	EC002584
ETIM 10.0	EC002584
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
756-9214/040-000

Continued on next page

Documentation

System Description

IP67 Cables and Plug-gable Connectors	pdf 157.80 KB	

Bid Text

756-9214/040-000	20.09.2017	doc 24.00 KB
756-9214/040-000	19.02.2019	xml 2.69 KB

CAD/CAE-Data

CAD data

2D/3D Models 756-9214/040-000	

CAE data

WSCAD Universe 756-9214/040-000	