
Data Sheet | Item Number: 757-265/000-010


M12 sensor/actuator box

https://www.wago.com/757-265/000-010



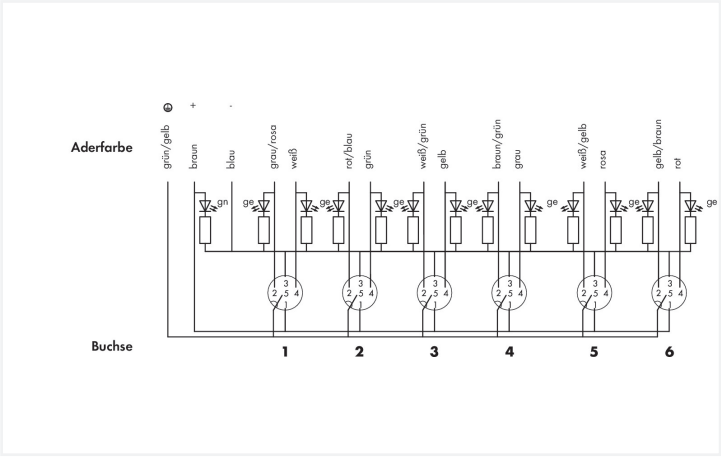

Similar to illustration

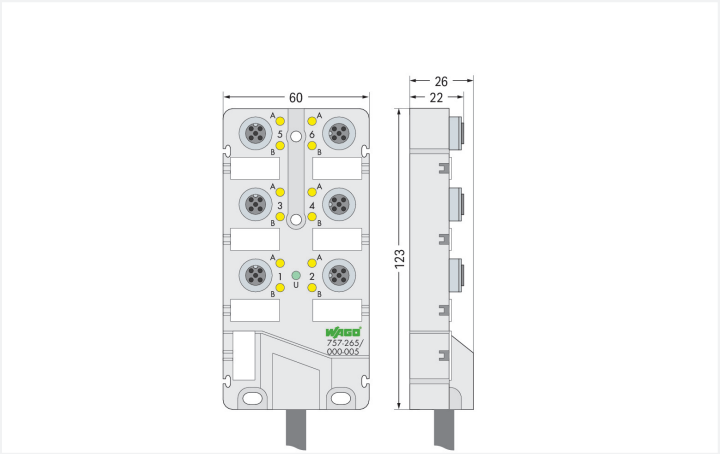

- M12 sensor/actuator box, 6-way
- 5-pole (2 signals per contact)
- Cable length: 5 and 10 m
- Green LED operating indicator
- Yellow LED status indicator
- incl. markers (10 pcs)
- incl. M12 protective caps (2 pcs)

Technical data	
Contact resistance (max.)	0.01 Ω
Supply voltage	10 … 30 VDC; Rated voltage: 32 V ~ rms
Current carrying capacity (signal connections)	2 A
Current carrying capacity (supply connections)	9 A
Rated value of electrical isolation	500 V
Functionally separated potential groups	Kontakt/Kontakt
Insulation resistance	>10^9 Ω
Signal characteristics	PNP
Indicators	LED (A, B) yellow: Signal status (2 x per contact); LED (U) green: Sensor/actuator box status

Connection Data

Connection technology: I/O	6 x M12 socket; 5-pole; incl. ground
Connection technology: trunk cable	1 x Fixed connecting cable
Length of connection cable	10 m
Strip length	100 mm / 3.94 inches
Wire colors	white, gray/pink, green, red/blue, yellow, white/green, gray, brown/green, pink, white/yellow, red, yellow/brown, green/yellow, brown, blue
Cable design	Wire cross-section: 0.34 mm²; Wire cross-section: 1 mm²

Physical data

Width	60 mm / 2.362 inches
Height	26 mm / 1.024 inches
Depth	123 mm / 4.843 inches

Mechanical data

Mounting type	Screw mount
Weight	1330 g

Material data

Housing material	PA 66 (UL 94 V0); RAL 7035; silicon and halogen free
Halogen-free	Yes
Sheathed cable diameter	8.8 mm
Bending radius	10 x cable diameter (min.) for flexible application
Material properties of the connections	Contact: CuSn, nickel base-coat plating and 0.8 µm gold-plated; Threaded bush: die-cast Zn, nickel-plated; Seal: Viton; 50 mating cycles
Sheath material	PUR
Sheathed cable color	black
Encapsulation	Fully encapsulated with conformal coating (UL 94 V0)

Environmental requirements

Ambient temperature (operation)	-25 … +80 °C
Ambient (operating) temperature (dynamic)	-5 … +80 °C
Ambient (operating) temperature (static)	-40 … +90 °C
Protection type	IP68
Note on protection type	72 hours at a depth of 1 meter underwater per EN 60529 in the fully locked position with its plugs or protective caps
Pollution degree	3 per VDE 0110
Vibration resistance	Per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27

Commercial data

Product Group	23 (I/O passive and accessories)
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454028459
Customs tariff number	85366990990

Continued on next page

Product Classification

UNSPSC	39121421
ETIM 9.0	EC002585
ETIM 10.0	EC002585
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Bulgaria)	0e5113b2-093c-451f-8554-22671979da98
SCIP notification number (Czech Republic)	661de120-6aaa-4eed-9b52-af59d85e1fc6

Approvals / Certificates

General approvals

Approval	Standard	Certificate Name
UL UL International Germany GmbH (ORDINARY LOCATIONS)	UL 508	E175199 Sec.5

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
757-265/000-010

Documentation

System Description

Sensor/Actuator Boxes – General Product Information	pdf 428.34 KB	

CAD/CAE-Data

CAD data

2D/3D Models
757-265/000-010

CAE data

EPLAN Data Portal
757-265/000-010

WSCAD Universe
757-265/000-010

ZUKEN Portal
757-265/000-010

Continued on next page

1 Compatible Products

1.1 Optional Accessories

1.1.1 Cover

1.1.1.1 Cover



Item No.: 756-8102
M12 protective cap; for unused sockets

1.1.2 Installation

1.1.2.1 Intermediate plate



Item No.: 757-060
Spacer module for sensor/actuator box; 6-way

1.1.3 Marking

1.1.3.1 Marking device



Item No.: 210-110
Fiber-tip pen

1.1.3.2 Marking strip



Item No.: 757-011
Marker card; not stretchable; snap-on type