
Data Sheet | Item Number: 773-332

Mounting carrier; 773 Series - 2.5 mm² / 4 mm² / 6 mm²; for DIN-35 rail mounting/ screw mounting; orange

https://www.wago.com/773-332



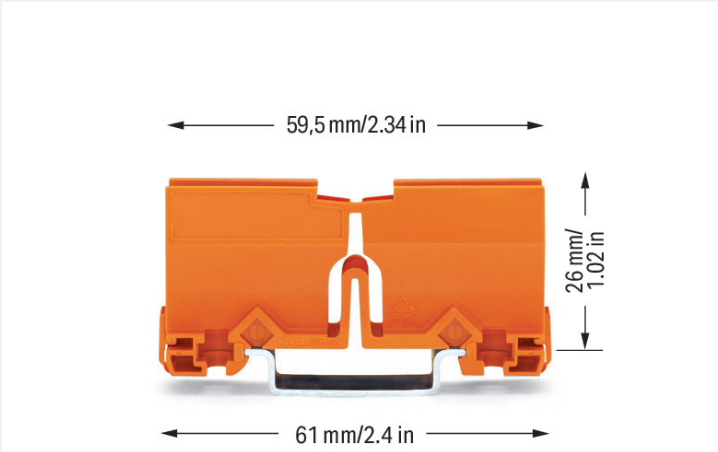

Color: orange

Physical data	
Width	18 mm / 0.709 inches
Height	78.2 mm / 3.079 inches
Depth from upper-edge of DIN-rail	25.3 mm / 0.996 inches
Depth	30.5 mm / 1.201 inches

Mechanical data	
Mounting type	DIN-35 rail Screw mount
Suitable	for all PUSH WIRE® junction box connectors (773 Series)

Material data	
Note (material data)	Information on material specifications can be found here
Color	orange
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.229 MJ
Weight	8.5 g

Environmental requirements

Continuous operating temperature	105 °C

Commercial data

Product Group	7 (Push Wire Conn.)
PU (SPU)	50 (10) pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918526524
Customs tariff number	39269097900

Product Classification

UNSPSC	39121702
eCl@ss 10.0	27-14-11-92
eCl@ss 9.0	27-14-11-92
ETIM 9.0	EC002848
ETIM 10.0	EC002848
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 773-332

Documentation

Bid Text

773-332	19.02.2019	xml 2.55 KB	
773-332	17.05.2017	doc 23.50 KB	
ausschreiben.de 773-332			

Continued on next page

CAD/CAE-Data

CAD data

2D/3D Models 773-332

CAE data

EPLAN Data Portal
773-332

WSCAD Universe
773-332

ZUKEN Portal 773-332

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking


1.1.1.1 Marking strip



Item No.: 210-834
Marking strips; on reel; 5 mm wide; plain; Self-adhesive; white

Installation Notes


Installation



Snap the mounting carrier onto the DIN-rail.




Use the cover as an end plate.



Remove the mounting carrier from the DIN-rail.

Application



A mounting carrier (see accessories) suits applications where the connectors must be marked and secured in position. The DIN-35 rail-mount carrier fits up to two connectors and can also be mounted on a flat surface using two screws.

Using this connector carrier, a large range of wiring applications can be achieved in distribution or junction boxes. To mention just a few: potential multiplication and changing from or to 6 mm² (10 AWG) conductor size.