


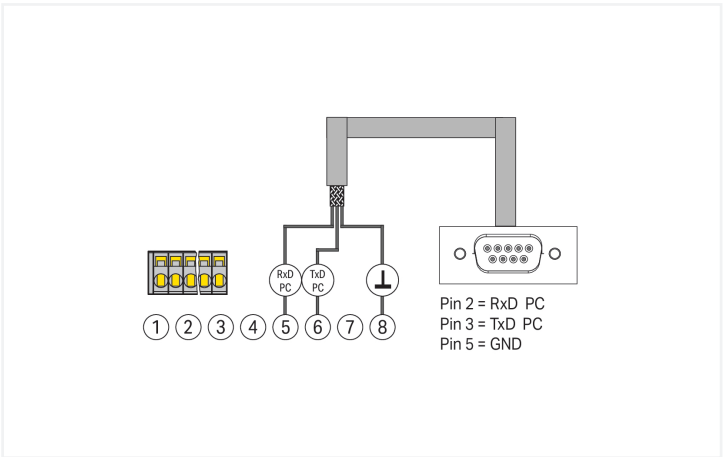

Short description:
WAGO's communication cable is used for configuration and visualization via PC or controller. It is suitable for all 787-8xx devices equipped with an RS-232 serial interface. Download the corresponding PC software for all 787 Series devices at www.wago.com. Function blocks for communication with the WAGO I/O System 750 and other control systems are also available.

Notes	
Note	The communication cable is not electrically isolated.

Technical data	
Signaling and Communication	
Signaling	1 x RS-232 cable
Communications	RS-232 serial interface

Safety and protection	
Protection type	IP20; per EN 60529

Connection Data	
Cable type	3 x 0.34 mm²; shielded

Connection 1	
Connection type	Module side (787-8xx)
Connection technology	1 x 8-pole female connector (733-108) with strain relief



Connection 2	
Connection type	PC/controller side
Connection technology	1 x 9 pole D-sub socket

Physical data	
Cable length	1.8 m

Material data	
Weight	113 g

Environmental requirements	
Ambient temperature (operation)	-10 ... +70 °C

Commercial data	
Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454909741
Customs tariff number	85444290900

Product Classification	
UNSPSC	26121604
eCl@ss 10.0	27-06-18-90
eCl@ss 9.0	27-06-03-11
ETIM 9.0	EC001408
ETIM 10.0	EC001408
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-890

↓



Documentation

Bid Text			
787-890	06.12.2019	xml 3.75 KB	↓
787-890	20.01.2015	doc 25.00 KB	↓
787-890	20.01.2015	docx 15.52 KB	↓
787-890	20.01.2015	pdf 67.29 KB	↓

CAD/CAE-Data

CAE data	
WSCAD Universe 787-890	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Cables and connectors

1.1.1.1 Connecting cable



Item No.: [761-9005](#)
USB adapter; with 1m connection cable