
Data Sheet | Item Number: 852-103/040-000

Industrial-Switch; 8-port 100Base-TX; 2 Slots 100Base-FX; Extended temperature range; EXT; black

https://www.wago.com/852-103/040-000



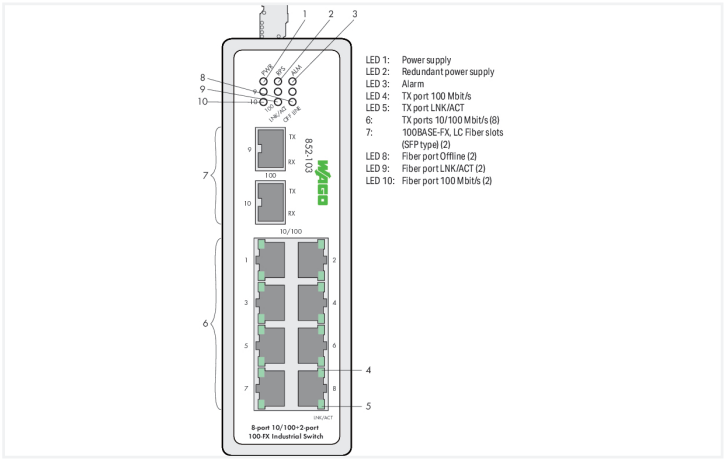

Color: ■ black

Similar to illustration

This unmanaged industrial ETHERNET switch (852-103/040-000) has eight Fast ETHERNET ports and 2 SFP slots (100BASE modules) for easily setting up small- to medium-sized networks. Its slim design paired with a DIN-rail adapter simplifies installation in the control cabinet and provides high vibration and shock resistance. Additionally, automatic transmission rate detection (auto-negotiation) and automatic identification of the transmit and receive lines (Auto MDI-X) allow simple plug-and-play operation, saving time and money during commissioning.

Status LEDs, a redundant power supply and an alarm contact (configurable via DIP switch) increase the switch's redundancy and diagnostic capabilities, providing higher operational uptime.

Features:

- Redundant DC power supply
- Large supply voltage range: 9 … 48 V
- DIP switch to set alarm functions
- Full compliance with IEEE802.3, 802.3u standards
- Non-blocking, store-and-forward switching
- Autonegotiation at all 10/100BASE-TX ports
- Auto-MDI/MDIX (crossover) at all 10/100BASE-TX ports

Technical data

Switching mode	Store-and-forward; non-blocking
Number of 100 Mbps ports	8
Number of 100 Mbit/s ports SFP	2
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX/FX IEEE 802.3x Flow Control
Redundancy function	Redundant DC power supply
Configuration options	DIP switch for signal contact
Diagnostics	Signal contact
MAC table (size)	2000 addresses
Jumbo frame size	1536 bytes
Supply voltage	9 … 48 VDC; Cable length < 3 m
Power consumption (max.)	6.08 W
Power consumption (typ.) (24 V)	5.76 W
ESD (contact/air discharge)	8 KV / 15 KV
Transmission rate	Copper cable: 10/100 Mbit/s; Fiber optic:100 Mbit/s

Technical data

Transmission medium (communication/fieldbus)	Copper cable: Cat. 5 or higher, 100 m maximum cable length; Fiber optic: FX Multi-Mode, LX Single-Mode
Optical fiber type	Single-mode and multi-mode
Packet throughput	148800 pkt/s
Control Elements	12 x DIP switches: alarm function for supply voltages and ports 1 … 10
Indicators	Device: LED (PWR, RPS) green: Power supply (primary), redundant power supply (secondary); LED (ALM) red: Alarm; LED (LNK/ACT, 100) green, LED (OFFLINE) red: Status fiber optic ports; per port: LED (100, LNK/ACT) green: Status 100 Mbps, LNK/ACT ports 1 … 8

Connection Data

Connection technology: communication/fieldbus	Copper cable: 8 x RJ-45; Fiber optic: 2 x SFP slots (e.g., with SFP module and LC fiber-optic connector)
Connection technology: supply	1 x Built-in male connector: 231-436/001-000; included female connector (*MCS* Connectors): 231-106/026-000

Physical data

Width	50 mm / 1.969 inches
Height	162 mm / 6.378 inches
Depth	120 mm / 4.724 inches

Mechanical data

Mounting type	DIN-35 rail

Material data

Color	black
Housing material	Aluminum
Weight	887 g
Conformity marking	CE

Environmental requirements

Ambient temperature (operation)	-40 … +70 °C (UL max. +60 °C)
Ambient temperature (storage)	-40 … +85 °C
Protection type	IP30
Relative humidity (without condensation)	95 %
Vibration resistance	Per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2
EMC emission of interference	per EN 61000-6-4

Commercial data

PU (SPU)	1 pcs
Packaging type	Box
Country of origin	TW
GTIN	4050821157663
Customs tariff number	85176200000
End of Sale	2025-08-31
End of Production	2026-07-16
End of Delivery	2026-07-17
End of Service and Repair	2026-07-18

Continued on next page

Product Classification

UNSPSC	43222612
eCl@ss 10.0	19-17-01-30
eCl@ss 9.0	19-17-01-06
ETIM 9.0	EC000734
ETIM 10.0	EC000734
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals

Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03083
KC National Radio Research Agency	Article 58-2, Clause 3	MSIP-REM-W43-ISW852

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
852-103/040-000

Documentation

Manual

Product Manual 8-Port 100 BASE-TX + 2-Slot 100 BASE-FX Industrial Switch	V 1.0.3 14.07.2020	pdf 1247.70 KB	

System Description

Industrial Switches – General Product Information	pdf 1873.93 KB	

Bid Text

852-103/040-000	19.02.2019	xml 5.09 KB	
852-103/040-000	09.05.2018	docx 15.11 KB	

Instruction Leaflet

Gebrauchs- und Montageanleitung 852-101 /852-102 / 852-103 / 852-104	pdf 1649.11 KB	

Continued on next page

CAD/CAE-Data

CAD data	CAE data
2D/3D Models 852-103/040-000	EPLAN Data Portal 852-103/040-000
	WSCAD Universe 852-103/040-000

1 Compatible Products

1.1 Optional Accessories

1.1.1 Cables and connectors

1.1.1.1 Connector plug



Item No.: 750-979/000-011
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief



Item No.: 750-979/000-021
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief



Item No.: 750-979/000-012
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief



Item No.: 750-979/000-022
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief



Item No.: 750-977/000-011
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22



Item No.: 750-978/000-011
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief



Item No.: 750-977/000-021
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24



Item No.: 750-978/000-021
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief



Item No.: 750-977/000-012
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22



Item No.: 750-978/000-012
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief



Item No.: 750-977/000-022
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24



Item No.: 750-978/000-022
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief



Item No.: 750-979/000-013
Connector PROFINET; RJ-45; Cat. 6A; angled; AWG 22; Strain relief



Item No.: 750-977/000-013
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22



Item No.: 750-978/000-013
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22; Strain relief



Item No.: 750-975
ETHERNET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly



Item No.: 750-976
PROFINET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly

1.1.2 Interface module

1.1.2.1 Interface module



Item No.: 289-195
Interface module; RJ-45; IDC technology; Cat. 6; in mounting carrier; with shield connection



Item No.: 289-175
Interface module; RJ-45; PCB terminal blocks, double-row; Cat. 5; in mounting carrier; with shield connection; with shield clamping saddle; 1,50 mm²



Item No.: 289-172
Interface module; RJ-45; RJ-45; Cat. 5; in mounting carrier



Item No.: 289-196
Interface module; RJ-45; with power jumper contacts; PCB terminal blocks; Cat. 5

Continued on next page

1.1.3 Plug

1.1.3.1 SFP module



Item No.: 852-201/107-002
SFP Module 100BASE; FX Multi-Mode 1310 nm LC; 2 km; silver-colored



Item No.: 852-201/107-030
SFP Module 100BASE; LX Single-Mode 1310 nm LC; 30 km; silver-colored

1.1.4 Power supply

1.1.4.1 Power Supply



Item No.: 787-1602
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 1 A output current; NEC Class 2; DC OK signal



Item No.: 787-1632
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 10 A output current; TopBoost; DC OK contact



Item No.: 787-1606
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 2 A output current; NEC Class 2; DC OK signal



Item No.: 787-1622
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 5 A output current; TopBoost; DC OK contact



Item No.: 787-1102
Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 1.3 A output current; DC-OK LED



Item No.: 787-1112
Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 2.5 A output current; DC-OK LED



Item No.: 787-1122
Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 4 A output current; DC-OK LED



Item No.: 787-1702
Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 1.25 A output current; DC-OK LED



Item No.: 787-1712
Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 2.5 A output current; DC-OK LED



Item No.: 787-1722
Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 5 A output current; DC-OK LED