


SylSplash
SylSplash 1200 IP65 3700lm 840
0045966

Caratteristiche prodotto

- SylSplash is a LED integrated polycarbonate housing luminaire with easy to access electrical terminal through bayonet lock end caps and tool-free electrical connection due to push-in terminal. Flexible installation as mounting brackets can be positioned freely on the luminaire. 36W; 3700lm; Efficiency with 103lm/W and 30,000 lifetime. SDCM 5; IP65; IK04; Class II; 1250mm x 53mm x 35mm

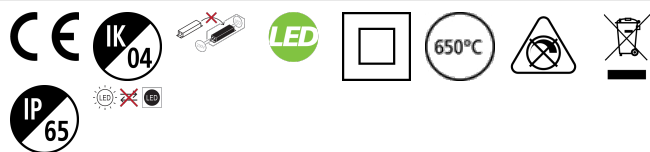

PANORAMICA DEL PRODOTTO

Nome prodotto	SylSplash 1200 IP65 3700lm 840
Tecnologia	LED
Cap/Base	N/A
Housing	PC Polycarbonate
General application	Logistics & Industry
ETIM Class	EC002892
E-number Finlandia	4278193
Garanzia	3 years
Fixture luminous flux (lm)	3700
Luminaire efficacy (lm/W)	103
Temperatura di colore (K)	4000
CRI (Ra)	80
Consistenza colore (SDCM)	SDCM5
Beam Angle (°)	125
Gruppo di rischio fotobiologico	RG0
Potenza totale (W)	36
Electrical protection	Classe II
Tipologia reattore	LED driver constant current
Dimmable	No
Colore corpo lampada	Bianco
IP rating	IP65
IK rating	IK04
Product EAN number	5410288459660

TABELLA DATI

Dati generali

Nome prodotto	SylSplash 1200 IP65 3700lm 840
Tecnologia	LED
Cap/Base	N/A
Housing	PC Polycarbonate
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25

SylSplash

SylSplash 1200 IP65 3700lm 840

0045966

ETIM Class	EC002892
E-number Finlandia	4278193
Garanzia	3 years

Dati ottici

Fixture luminous flux (lm)	3700
Luminaire efficacy (lm/W)	103
Temperatura di colore (K)	4000
CRI (Ra)	80
Consistenza colore (SDCM)	SDCM5
Beam Angle (°)	125
Distribution type	Diffuse
Gruppo di rischio fotobiologico	RG0

Dati elettrici

Potenza totale (W)	36
Tensione di rete (V)	220-240V
Lamp power factor	0.9
Electrical protection	Classe II
Tipologia reattore	LED driver constant current
Dimmable	No
Drive current (mA)	90
Drive current - Range (mA)	145mA / 175mA
Corrente di spunto (A)	12
Durata picco di corrente (µs)	350
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A B Breaker	10
Max. Luminaires per 13A B Breaker	15
Max. Luminaires per 16A B Breaker	20
Max. Luminaires per 20A B Breaker	25

Dati vita utile

Vita utile nominale - L70 B50	30000
Vita utile nominale - L70 B20	30000
Vita utile nominale - L70 B10	30000
Vita utile nominale - L80 B50	30000
Vita utile nominale - L80 B20	28000
Vita utile nominale - L80 B10	24000
Vita utile nominale - L90 B50	21000
Vita utile nominale - L90 B20	15000
Vita utile nominale - L90 B10	13000

Dati dimensionali

Colore corpo lampada	Bianco
IP rating	IP65
IK rating	IK04

SylSplash

SylSplash 1200 IP65 3700lm 840

0045966

Diffuser finish	Opalino
Diffuser material	PC Polycarbonate
Lunghezza nominale del prodotto (mm)	1250
Larghezza nominale prodotto (mm)	53
Nominal Product Height (mm)	35
Peso (Kg)	0.3


Dati di imballo

Tipologia imballo singolo	Mix blister(20% carton, 80% pl)
Product EAN number	5410288459660
Lunghezza imballo singolo (mm)	125.3
Larghezza imballo singolo (cm)	3.7
Packaging single depth (cm)	5.5
DUN14 (outer)	15410288459667
Quantità per imballo esterno	20
Packaging outer length / height (cm)	128.2
Packaging outer width (cm)	24.5
Packaging outer depth (cm)	21.5

Dati di sicurezza

Temperatura ottimale di utilizzo (°C)	-20-40
---------------------------------------	--------

FOTOMETRIA

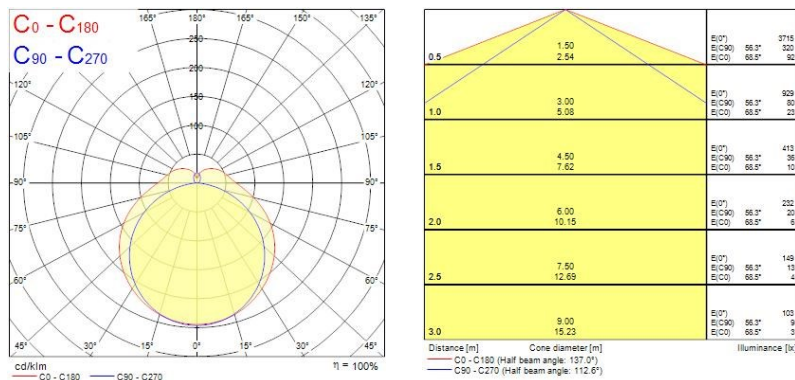

DISEGNI TECNICI

