SG7100x SG7100x **ELECTRIC START ELECTRIC START** 

## **POWER GENERATOR 5500 W**

- 12.2 HP petrol engine with electric start or pull starter as alternative
- Powerful and air cooled 4 stroke petrol engine with 420 cm³ displacement
- Max. 5500 W output power, 5000 W rated output
- A 400 V~ connection, two 230 V~ connection and a 12 V DC connector offering maximum flexibility
- Sturdy and robust steel frame with wheel kit and hinged handles
- 25 litre petrol tank allows using the generator for hours
- Integrated overload protection, voltmeter and low oil warning






SPECIFICATIONS - GENERATOR		
Dimensions L x W x H	760 x 700 x 650 mm	
Voltage control	AVR-System	
230 V / 400 V max. output / rated	5000 / 5500 W (400 V~) 1700 / 1800 W (230 V~)	
Socket	2 x 230 V~ / 1 x 400 V~	
AC frequency	50 Hz	
Overload protection	Yes	
Low oil warning	Yes	
Voltmeter	Yes	

SPECIFICATIONS - ENGINE		
Model	Single-cylinder 4 stroke petrol engine	
Max. engine power	12.2 HP	
Displacement	420 cc	
Starter	Pull starter, electric starter	
Tank capacity	25 L	

LOGISTICAL DATA	
Weight net / gross	82 / 89 kg
Packaging dimensions	790 x 595 x 595 mm
Article number	5906229903
Barcode	4046664194804
40 HQ Container	220 pcs



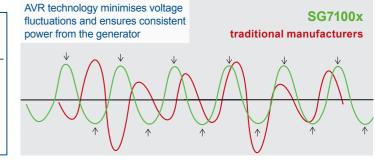





1 x 400 V~ connection 1 x 12 V~ connection

2 x 230 V~ power outlet



Oil warning indicator



Robust



Overload protection



Fuel-saving



Power pack

Easy to manoeuvre







