23 kN PLATE COMPACTOR • Plate size: 540 x 420 mm Compacting pressure: 23000 N Powerful 5.6 hp engine • High feed speed - to increase work performance House construction Road construction • Including travel fixture for transport also by one person • Including black rubber pad for paving • Automatic feed - still allows the user trouble-free intervention in the direction of movement Vibration resistant handle Powerful 5.6 HP petrol engine Easy start using pull starter Adjustable ₩4.1kw handle Inclines up to 20° are easily possible Feed speed: 15 m/min scheppach Ζ Base plate made of Compacting using the vibrating plate prevents the substrate subsiding. high quality steel 23000 N Compaction force

SPECIFICATIONS

0. 20. 10/ 10/ 10	
Dimensions L x W x H	1140 x 400 x 840 mm
Plate size	540 x 420 mm
Compaction force	23000 N
Travel speed	15 m/min
Compaction depth	35 cm
Capacity	196 cm ³
Engine	5.6 HP; petrol

LOGISTICAL DATA	
Weight net / gross	82.5 / 86.3 kg
Packaging dimensions	705 x 435 x 500 mm
Article number	5904617903
Barcode	4046664144199
20 Container	156 pcs
40 Container	312 pcs
40 HQ Container	312 pcs

2-11 The second **PRODUKT-DETAILS** 15 m/min Travel speed




540 x 420 mm Plate size

Robust





www. supped .com | Issue 2022-10-21 | Subject to technical change without notice. Errors and omissions excepted.

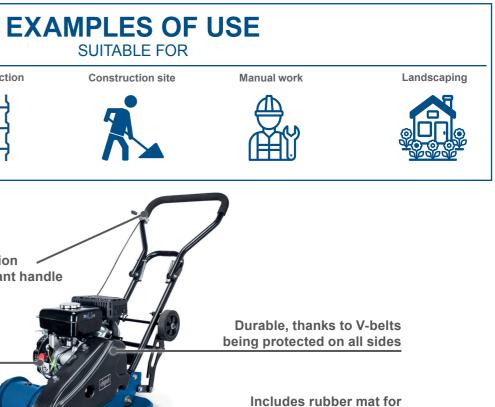

paving work





5500 vibrations/min Vibration



Transportable



30 cm **Compaction depth**



Compact design



www. supped .com