

10" CIRCULAR TABLE SAW

- High-performance 2000 W motor
- Table extensions increase the space on the left and right
- Table height 830 mm, table dimensions 563 x 583 mm
- Standard base frame with non-slip rubber feet
- Cutting height up to 85 mm
- Carbide saw blade with a diameter of 250 mm
- Tilting saw blade from 0 – 45°
- Heights and angles can be adjusted with a hand wheel
- Includes saw blade guard, sawblade with 24 teeth (pre-assembled), sawblade with 48 teeth, mitre gauge and fence



Mitre gauge



SPECIFICATIONS	
Dimensions L x W x H	894 x 630 x 1030 mm
Saw blade dimensions	Ø 250 x Ø 30 x 2.8 mm, 24Z, 48Z
Blade speed	5000 rpm
Table size	563 x 583 mm
Table size with extension	894 x 583 mm
Table height	830 mm
Cutting depth at 90°	85 mm
Cutting depth at 45°	65 mm
Motor	220 - 240 V~ / 50 Hz
Input	2000 W

LOGISTICAL DATA

Weight net / gross	19 / 22 kg
Packaging dimensions	710 x 620 x 330 mm
Article number	5901310905
Barcode	4046664064381
20 Container	189 pcs
40 Container	399 pcs
40 HQ Container	453 pcs

INCLUDED



EXAMPLES OF USE
SUITABLE FOR


Beams



Profiled boards




Boards



Longitudinal cuts




Mitre cuts




Very sturdy, thanks to frame and non-slip rubber feet.



The HS100S has a maximum cutting height of 85 mm and can effortlessly process softwood as well as hardwood.

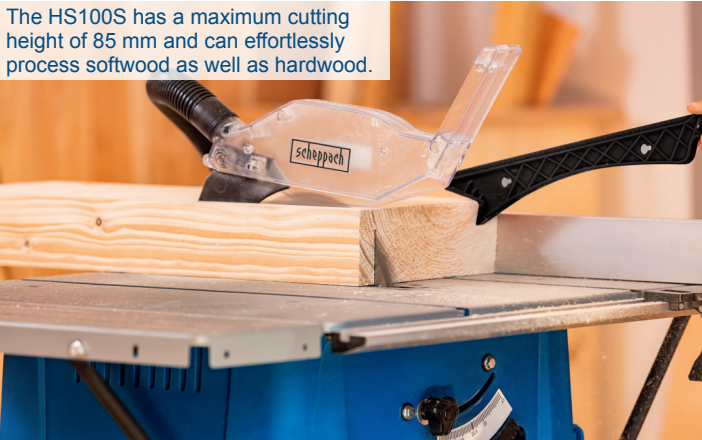

Ergonomic working posture, thanks to a table height of 830 mm.

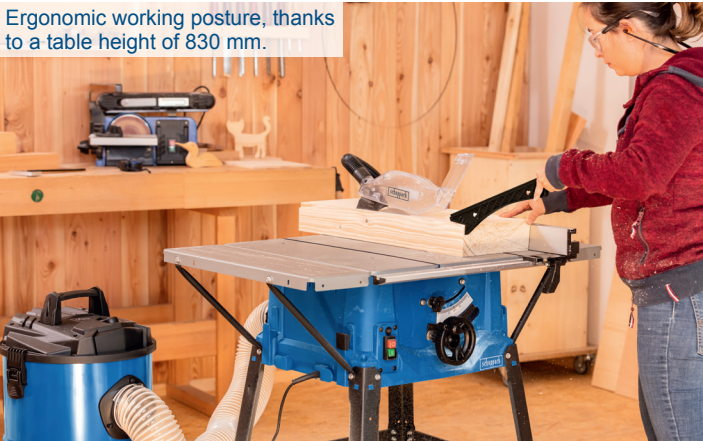

The table width extensions on both sides allow processing of large work pieces.



PRODUCT DETAILS

Cutting height
max. 90°: 85 mm



Cutting height
max. 45°: 65 mm




Table width extension
(left and right)




Ergonomic table
height 830 mm



Saw blade
255 mm x 30 mm x 2.8 mm



Swivelling saw blade
0 - 45°



Dust can be extracted directly from the housing or saw blade guard. This allows working in particularly low-dust conditions.



The saw table shelving area of the HS100S is approximately 60% bigger than that of other manufacturers.

